

Vesto Single

350mA/500mA

Type Downlight
Mounting Recessed
Material Aluminium
Adjustable No
El. class / IP Class III / IP20
El. class driver Class II
Warranty: see p.308


CREE CXB LED (350mA)

CCT 2700K / 3000K / 4000K
CRI Ra90
SDCM 3
Luminous Flux LED
2700K - Ra90: 346lm (115lm/W)
3000K - Ra90: 374lm (125lm/W)
4000K - Ra90: 401lm (134lm/W)
Luminous Flux System
2700K - Ra90: 280lm (82lm/W)
3000K - Ra90: 302lm (88lm/W)
4000K - Ra90: 324lm (95lm/W)
LED Power 3.0W (excl. driver)
System Power 3.4W (incl. driver)
Current 350mA
Forward voltage 8.6V (typ.)

CREE CXB LED (500mA)

CCT 2700K / 3000K / 4000K
CRI Ra90
SDCM 3
Luminous Flux LED
2700K - Ra90: 468lm (106lm/W)
3000K - Ra90: 505lm (115lm/W)
4000K - Ra90: 542lm (123lm/W)
Luminous Flux System
2700K - Ra90: 378lm (86lm/W)
3000K - Ra90: 408lm (93lm/W)
4000K - Ra90: 438lm (100lm/W)
LED Power 4.4W (excl. driver)
System Power 5.0W (incl. driver)
Current 500mA
Forward voltage 8.9V (typ.)

 52x52mm (+4/-0)

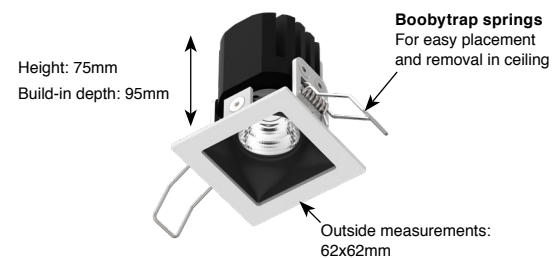


Weight: 200g
(excl. driver)



Driver:
- Included in article number and included in price
- External/Remote installation

Data sheets and wiring guide: see website
Driver information: see p.294-295

Air circulation notice:
Do not topload with insulation materials

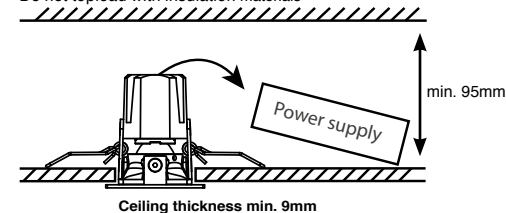



Vesto 350

Single

PRICES INCL. DRIVERS

Non dim 350mA (Driver 493.24.15 incl.)

2700K - Ra90 - 3.4W - 346lm	1066.AA.24.927.XX
3000K - Ra90 - 3.4W - 374lm	1066.AA.24.930.XX
4000K - Ra90 - 3.4W - 401lm	1066.AA.24.940.XX

1-10V dim & Push dim 350mA (Driver 490.25.20 incl.)

2700K - Ra90 - 3.4W - 346lm	1066.AA.25.927.XX
3000K - Ra90 - 3.4W - 374lm	1066.AA.25.930.XX
4000K - Ra90 - 3.4W - 401lm	1066.AA.25.940.XX

DALI dim 350mA (Driver 490.26.20 incl.)

2700K - Ra90 - 3.4W - 346lm	1066.AA.26.927.XX
3000K - Ra90 - 3.4W - 374lm	1066.AA.26.930.XX
4000K - Ra90 - 3.4W - 401lm	1066.AA.26.940.XX

Mains dim

1x Vesto Single: not available

2x Vesto Single connected in series: on request*

3x/4x Vesto Single connected in series: on request*

*max. distance driver to last Vesto in loop: 15m (wire diam. min. 1mm²)



Vesto 500 NEW!

Single

PRICES INCL. DRIVERS

Non dim 500mA (Driver 493.24.22 incl.)

2700K - Ra90 - 5.0W - 468lm	1096.AA.24.927.XX
3000K - Ra90 - 5.0W - 505lm	1096.AA.24.930.XX
4000K - Ra90 - 5.0W - 542lm	1096.AA.24.940.XX

1-10V dim & Push dim 500mA (Driver 490.25.20 incl.)

2700K - Ra90 - 5.0W - 468lm	1096.AA.25.927.XX
3000K - Ra90 - 5.0W - 505lm	1096.AA.25.930.XX
4000K - Ra90 - 5.0W - 542lm	1096.AA.25.940.XX

DALI dim 500mA (Driver 490.26.20 incl.)

2700K - Ra90 - 5.0W - 468lm	1096.AA.26.927.XX
3000K - Ra90 - 5.0W - 505lm	1096.AA.26.930.XX
4000K - Ra90 - 5.0W - 542lm	1096.AA.26.940.XX

Mains dim 500mA (Driver 493.27.20 incl.)

2700K - Ra90 - 5.0W - 468lm	1096.AA.27.927.XX
3000K - Ra90 - 5.0W - 505lm	1096.AA.27.930.XX
4000K - Ra90 - 5.0W - 542lm	1096.AA.27.940.XX

NEW!

36° Reflector: 0000.36.00.000.00
55° Reflector: 0000.55.00.000.00

Available colors: 0000.00.00.000.XX
Other RAL colors on request

01



White
Standard

18



Grey
Standard

03



Black
Standard

05



White + Black
Standard

16



Gold Matt

11



Black + Gold Matt

Vesto Double

350mA/500mA

Type	Downlight
Mounting	Recessed
Material	Aluminium
Adjustable	No
El. class / IP	Class III / IP20
El. class driver	Class II
Warranty:	see p.308


CREE CXB LED (350mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90
SDCM	3
Luminous Flux LED	2700K - Ra90: 346lm (115lm/W) 3000K - Ra90: 374lm (125lm/W) 4000K - Ra90: 401lm (134lm/W)
Luminous Flux System	2700K - Ra90: 280lm (82lm/W) 3000K - Ra90: 302lm (88lm/W) 4000K - Ra90: 324lm (95lm/W)
LED Power	3.0W (excl. driver)
System Power	3.4W (incl. driver)
Current	350mA
Forward voltage	8.6V (typ.)

CREE CXB LED (500mA)


CCT	2700K / 3000K / 4000K
CRI	Ra90
SDCM	3
Luminous Flux LED	2700K - Ra90: 468lm (106lm/W) 3000K - Ra90: 505lm (115lm/W) 4000K - Ra90: 542lm (123lm/W)
Luminous Flux System	2700K - Ra90: 378lm (86lm/W) 3000K - Ra90: 408lm (93lm/W) 4000K - Ra90: 438lm (100lm/W)
LED Power	4.4W (excl. driver)
System Power	5.0W (incl. driver)
Current	500mA
Forward voltage	8.9V (typ.)

 52x93mm (+4/-0)

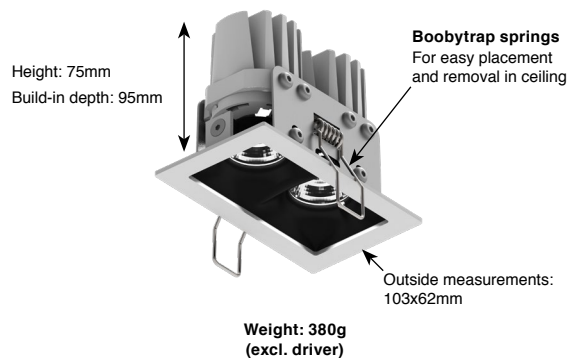

Driver:
- Included in article number and included in price
- External/Remote installation

Data sheets and wiring guide: see website
Driver information: see p.294-295

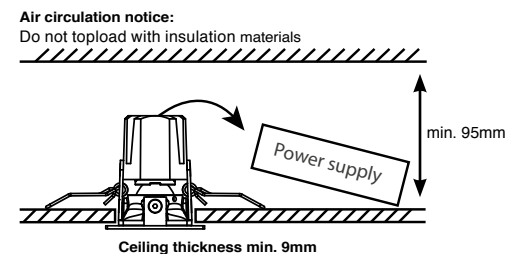



Vesto 350

Double

PRICES INCL. DRIVERS

Non dim 350mA (Driver 493.24.15 incl.)

(2x) 2700K - Ra90 - 3.4W - 346lm	1067.AA.24.927.XX
(2x) 3000K - Ra90 - 3.4W - 374lm	1067.AA.24.930.XX
(2x) 4000K - Ra90 - 3.4W - 401lm	1067.AA.24.940.XX

1-10V dim & Push dim 350mA (Driver 490.25.20 incl.)

(2x) 2700K - Ra90 - 3.4W - 346lm	1067.AA.25.927.XX
(2x) 3000K - Ra90 - 3.4W - 374lm	1067.AA.25.930.XX
(2x) 4000K - Ra90 - 3.4W - 401lm	1067.AA.25.940.XX

DALI dim 350mA (Driver 490.26.20 incl.)

(2x) 2700K - Ra90 - 3.4W - 346lm	1067.AA.26.927.XX
(2x) 3000K - Ra90 - 3.4W - 374lm	1067.AA.26.930.XX
(2x) 4000K - Ra90 - 3.4W - 401lm	1067.AA.26.940.XX

Mains dim 350mA (Driver 490.27.20 incl.)

(2x) 2700K - Ra90 - 3.4W - 346lm	1067.AA.27.927.XX
(2x) 3000K - Ra90 - 3.4W - 374lm	1067.AA.27.930.XX
(2x) 4000K - Ra90 - 3.4W - 401lm	1067.AA.27.940.XX



Vesto 500 NEW!

Double

PRICES INCL. DRIVERS

Non dim 500mA (Driver 493.24.22 incl.)

(2x) 2700K - Ra90 - 5.0W - 468lm	1097.AA.24.927.XX
(2x) 3000K - Ra90 - 5.0W - 505lm	1097.AA.24.930.XX
(2x) 4000K - Ra90 - 5.0W - 542lm	1097.AA.24.940.XX

1-10V dim & Push dim 500mA (Driver 490.25.20 incl.)

(2x) 2700K - Ra90 - 5.0W - 468lm	1097.AA.25.927.XX
(2x) 3000K - Ra90 - 5.0W - 505lm	1097.AA.25.930.XX
(2x) 4000K - Ra90 - 5.0W - 542lm	1097.AA.25.940.XX

DALI dim 500mA (Driver 490.26.20 incl.)

(2x) 2700K - Ra90 - 5.0W - 468lm	1097.AA.26.927.XX
(2x) 3000K - Ra90 - 5.0W - 505lm	1097.AA.26.930.XX
(2x) 4000K - Ra90 - 5.0W - 542lm	1097.AA.26.940.XX

Mains dim 500mA (Driver 493.27.20 incl.)

(2x) 2700K - Ra90 - 5.0W - 468lm	1097.AA.27.927.XX
(2x) 3000K - Ra90 - 5.0W - 505lm	1097.AA.27.930.XX
(2x) 4000K - Ra90 - 5.0W - 542lm	1097.AA.27.940.XX

NEW!

36° Reflector: 0000.36.00.000.00
55° Reflector: 0000.55.00.000.00

Available colors: 0000.00.00.000.XX
Other RAL colors on request

01



White
Standard

18



Grey
Standard

03



Black
Standard

05



White + Black
Standard

16



Gold Matt

11



Black + Gold Matt

Vesto Triple

350mA/500mA


Type	Downlight
Mounting	Recessed
Material	Aluminium
Adjustable	No
El. class / IP	Class III / IP20
El. class driver	Class II
Warranty: see p.308	

CREE CXB LED (350mA)


CCT	2700K / 3000K / 4000K
CRI	Ra90
SDCM	3
Luminous Flux LED	2700K - Ra90: 346lm (115lm/W) 3000K - Ra90: 374lm (125lm/W) 4000K - Ra90: 401lm (134lm/W)
Luminous Flux System	2700K - Ra90: 280lm (82lm/W) 3000K - Ra90: 302lm (88lm/W) 4000K - Ra90: 324lm (95lm/W)
LED Power	3.0W (excl. driver)
System Power	3.4W (incl. driver)
Current	350mA
Forward voltage	8.6V (typ.)

CREE CXB LED (500mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90
SDCM	3
Luminous Flux LED	2700K - Ra90: 468lm (106lm/W) 3000K - Ra90: 505lm (115lm/W) 4000K - Ra90: 542lm (123lm/W)
Luminous Flux System	2700K - Ra90: 378lm (86lm/W) 3000K - Ra90: 408lm (93lm/W) 4000K - Ra90: 438lm (100lm/W)
LED Power	4.4W (excl. driver)
System Power	5.0W (incl. driver)
Current	500mA
Forward voltage	8.9V (typ.)




52x135mm (+4/-0)

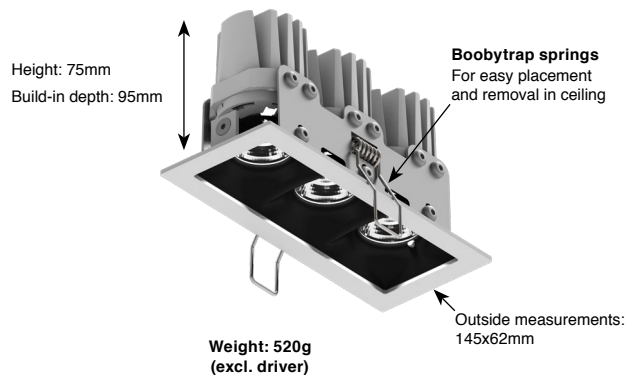

Driver:
- Included in article number and included in price
- External/Remote installation

Data sheets and wiring guide: see website
Driver information: see p.294-295

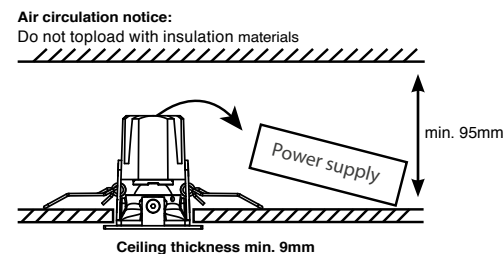



Vesto 350

Triple

PRICES INCL. DRIVERS

Non dim 350mA (Driver 493.24.15 incl.)

(3x) 2700K - Ra90 - 3.4W - 346lm	1068.AA.24.927.XX
(3x) 3000K - Ra90 - 3.4W - 374lm	1068.AA.24.930.XX
(3x) 4000K - Ra90 - 3.4W - 401lm	1068.AA.24.940.XX

1-10V dim & Push dim 350mA (Driver 490.25.20 incl.)

(3x) 2700K - Ra90 - 3.4W - 346lm	1068.AA.25.927.XX
(3x) 3000K - Ra90 - 3.4W - 374lm	1068.AA.25.930.XX
(3x) 4000K - Ra90 - 3.4W - 401lm	1068.AA.25.940.XX

DALI dim 350mA (Driver 490.26.20 incl.)

(3x) 2700K - Ra90 - 3.4W - 346lm	1068.AA.26.927.XX
(3x) 3000K - Ra90 - 3.4W - 374lm	1068.AA.26.930.XX
(3x) 4000K - Ra90 - 3.4W - 401lm	1068.AA.26.940.XX

Mains dim 350mA (Driver 495.27.20 incl.)

(3x) 2700K - Ra90 - 3.4W - 346lm	1068.AA.27.927.XX
(3x) 3000K - Ra90 - 3.4W - 374lm	1068.AA.27.930.XX
(3x) 4000K - Ra90 - 3.4W - 401lm	1068.AA.27.940.XX

Vesto 500 NEW!

Triple

PRICES INCL. DRIVERS

Non dim 500mA (Driver 493.24.22 incl.)

(3x) 2700K - Ra90 - 5.0W - 468lm	1098.AA.24.927.XX
(3x) 3000K - Ra90 - 5.0W - 505lm	1098.AA.24.930.XX
(3x) 4000K - Ra90 - 5.0W - 542lm	1098.AA.24.940.XX

1-10V dim & Push dim 500mA (Driver 490.25.20 incl.)

(3x) 2700K - Ra90 - 5.0W - 468lm	1098.AA.25.927.XX
(3x) 3000K - Ra90 - 5.0W - 505lm	1098.AA.25.930.XX
(3x) 4000K - Ra90 - 5.0W - 542lm	1098.AA.25.940.XX

DALI dim 500mA (Driver 490.26.20 incl.)

(3x) 2700K - Ra90 - 5.0W - 468lm	1098.AA.26.927.XX
(3x) 3000K - Ra90 - 5.0W - 505lm	1098.AA.26.930.XX
(3x) 4000K - Ra90 - 5.0W - 542lm	1098.AA.26.940.XX

Mains dim 500mA (Driver 493.27.20 incl.)

(3x) 2700K - Ra90 - 5.0W - 468lm	1098.AA.27.927.XX
(3x) 3000K - Ra90 - 5.0W - 505lm	1098.AA.27.930.XX
(3x) 4000K - Ra90 - 5.0W - 542lm	1098.AA.27.940.XX

NEW!

36° Reflector: 0000.36.00.000.00

55° Reflector: 0000.55.00.000.00

Available colors: 0000.00.00.000.XX

Other RAL colors on request

01



White
Standard

18



Grey
Standard

03



Black
Standard

05



White + Black
Standard

16



Gold Matt

11



Black + Gold Matt

Vesto Quadro

350mA/500mA

Type	Downlight
Mounting	Recessed
Material	Aluminium
Adjustable	No
El. class / IP	Class III / IP20
El. class driver	Class II
Warranty:	see p.308

CREE CXB LED (350mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90
SDCM	3
Luminous Flux LED	2700K - Ra90: 346lm (115lm/W) 3000K - Ra90: 374lm (125lm/W) 4000K - Ra90: 401lm (134lm/W)
Luminous Flux System	2700K - Ra90: 280lm (82lm/W) 3000K - Ra90: 302lm (88lm/W) 4000K - Ra90: 324lm (95lm/W)
LED Power	3.0W (excl. driver)
System Power	3.4W (incl. driver)
Current	350mA
Forward voltage	8.6V (typ.)

CREE CXB LED (500mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90
SDCM	3
Luminous Flux LED	2700K - Ra90: 468lm (106lm/W) 3000K - Ra90: 505lm (115lm/W) 4000K - Ra90: 542lm (123lm/W)
Luminous Flux System	2700K - Ra90: 378lm (86lm/W) 3000K - Ra90: 408lm (93lm/W) 4000K - Ra90: 438lm (100lm/W)
LED Power	4.4W (excl. driver)
System Power	5.0W (incl. driver)
Current	500mA
Forward voltage	8.9V (typ.)



52x176mm (1/4"-0)





Driver:
- Included in article number and included in price
- External/Remote installation

Data sheets and wiring guide: see website
Driver information: see p.294-295

Air circulation notice:

Do not topload with insulation materials

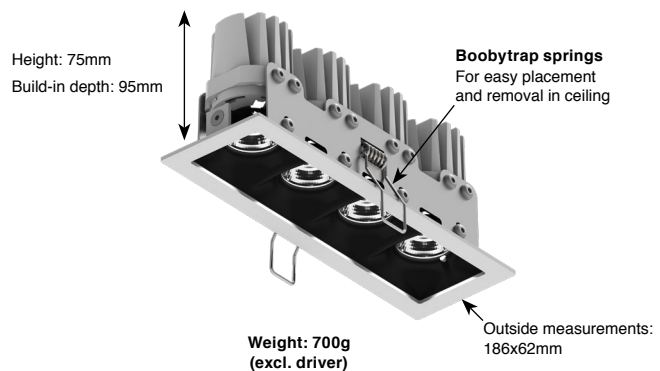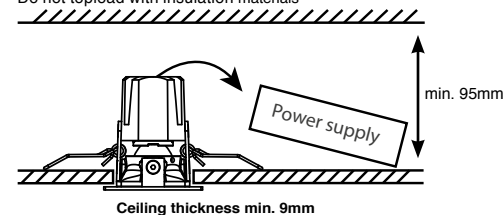



Vesto 350

Quadro

PRICES INCL. DRIVERS

Non dim 350mA (Driver 493.24.15 incl.)

(4x) 2700K - Ra90 - 3.4W - 346lm	1069.AA.24.927.XX
(4x) 3000K - Ra90 - 3.4W - 374lm	1069.AA.24.930.XX
(4x) 4000K - Ra90 - 3.4W - 401lm	1069.AA.24.940.XX

1-10V dim & Push dim 350mA (Driver 490.25.20 incl.)

(4x) 2700K - Ra90 - 3.4W - 346lm	1069.AA.25.927.XX
(4x) 3000K - Ra90 - 3.4W - 374lm	1069.AA.25.930.XX
(4x) 4000K - Ra90 - 3.4W - 401lm	1069.AA.25.940.XX

DALI dim 350mA (Driver 490.26.20 incl.)

(4x) 2700K - Ra90 - 3.4W - 346lm	1069.AA.26.927.XX
(4x) 3000K - Ra90 - 3.4W - 374lm	1069.AA.26.930.XX
(4x) 4000K - Ra90 - 3.4W - 401lm	1069.AA.26.940.XX

Mains dim 350mA (Driver 495.27.20 incl.)

(4x) 2700K - Ra90 - 3.4W - 346lm	1069.AA.27.927.XX
(4x) 3000K - Ra90 - 3.4W - 374lm	1069.AA.27.930.XX
(4x) 4000K - Ra90 - 3.4W - 401lm	1069.AA.27.940.XX

Vesto 500 NEW!

Quadro

PRICES INCL. DRIVERS

Non dim 500mA (Driver 493.24.22 incl.)

(4x) 2700K - Ra90 - 5.0W - 468lm	1099.AA.24.927.XX
(4x) 3000K - Ra90 - 5.0W - 505lm	1099.AA.24.930.XX
(4x) 4000K - Ra90 - 5.0W - 542lm	1099.AA.24.940.XX

1-10V dim & Push dim 500mA (Driver 490.25.20 incl.)

(4x) 2700K - Ra90 - 5.0W - 468lm	1099.AA.25.927.XX
(4x) 3000K - Ra90 - 5.0W - 505lm	1099.AA.25.930.XX
(4x) 4000K - Ra90 - 5.0W - 542lm	1099.AA.25.940.XX

DALI dim 500mA (Driver 490.26.20 incl.)

(4x) 2700K - Ra90 - 5.0W - 468lm	1099.AA.26.927.XX
(4x) 3000K - Ra90 - 5.0W - 505lm	1099.AA.26.930.XX
(4x) 4000K - Ra90 - 5.0W - 542lm	1099.AA.26.940.XX

Mains dim 500mA (Driver 493.27.20 incl.)

(4x) 2700K - Ra90 - 5.0W - 468lm	1099.AA.27.927.XX
(4x) 3000K - Ra90 - 5.0W - 505lm	1099.AA.27.930.XX
(4x) 4000K - Ra90 - 5.0W - 542lm	1099.AA.27.940.XX

NEW!

36° Reflector: 0000.36.00.000.00
55° Reflector: 0000.55.00.000.00

Available colors: 0000.00.00.000.XX
Other RAL colors on request

01



White
Standard

18



Grey
Standard

03



Black
Standard

05



White + Black
Standard

16



Gold Matt

11



Black + Gold Matt





NEW Tektus Recessed

Type	Spot-/Downlight
Mounting	Recessed
Material	Aluminium
Adjustable	Yes (60°/359°)
El. class / IP	Class III / IP20
El. class driver	Class II
Warranty:	see p.308

Tektus 45: Bridgelux Vero 10 LED (350mA)



CCT	2700K / 3000K / 4000K
CRI	Ra90 (Ra80 on request)
SDCM	3
Luminous Flux LED	2700K - Ra90: 1100lm (124lm/W) 3000K - Ra90: 1156lm (130lm/W) 4000K - Ra90: 1072lm (132lm/W)
Luminous Flux System	2700K - Ra90: 772lm (76lm/W) 3000K - Ra90: 811lm (80lm/W) 4000K - Ra90: 822lm (81lm/W)
Beam angle	29° / 40° / 51°
LED Power	8.9W / 350mA (excl. driver)
System Power	10.2W / 350mA (incl. driver)
Forward voltage	23V (min.) - 25.5V (typ.) - 28V (max.)

Tektus 45: Bridgelux Dim-to-warm LED (250mA)

CCT	Dim-to-warm 1800-3000K
CRI	Ra90
Luminous Flux LED	860lm - System: 603lm
LED Power	8.2W / 250mA (excl. driver)
System Power	9.4W / 250mA (incl. driver)

Tektus 60: Citizen CLU LED (350mA/500mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90
SDCM	3
Luminous flux LED (350/500mA)	2700K - Ra90: 1517lm (350mA) / 2118lm (500mA) 3000K - Ra90: 1577lm (350mA) / 2202lm (500mA) 4000K - Ra90: 1601lm (350mA) / 2236lm (500mA)
Luminous Flux System	2700K - Ra90: 995lm (350mA) / 1390lm (500mA) 3000K - Ra90: 1035lm (350mA) / 1445lm (500mA) 4000K - Ra90: 1050lm (350mA) / 1467lm (500mA)
Beam angle	23° / 36° / 48° / 57°
LED Power	11.3W / 350mA or 16.5W / 500mA (excl. driver)
System Power	12.9W / 350mA or 19.0W / 500mA (incl. driver)
Forward voltage	29.3V (min.) - 32.6V (typ.) - 33.6V (max.)

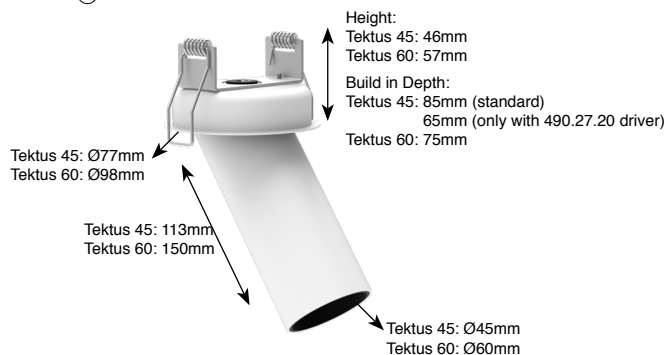

Driver:
- Included in article number and included in price
- External/Remote installation

Air circulation notice:
Do not toplevel with insulation materials

Data sheets and wiring guide: see website
Driver information: see p.294-295

On Request
Bridgelux Vero10 CRI Ra97



Tektus 45 Recessed **NEW!**

PRICES INCL. DRIVERS

Non dim - Driver 490.24.16 incl.

2700K - Ra90 - 10.2W - 772lm 1073.**AA**.24.927.**XX**

3000K - Ra90 - 10.2W - 811lm 1073.**AA**.24.930.**XX**

4000K - Ra90 - 10.2W - 822lm 1073.**AA**.24.940.**XX**

1-10V dim & Push dim - Driver 490.25.20 incl.

2700K - Ra90 - 10.2W - 772lm 1073.**AA**.25.927.**XX**

3000K - Ra90 - 10.2W - 811lm 1073.**AA**.25.930.**XX**

4000K - Ra90 - 10.2W - 822lm 1073.**AA**.25.940.**XX**

DALI dim - Driver 490.26.20 incl.

2700K - Ra90 - 10.2W - 772lm 1073.**AA**.26.927.**XX**

3000K - Ra90 - 10.2W - 811lm 1073.**AA**.26.930.**XX**

4000K - Ra90 - 10.2W - 822lm 1073.**AA**.26.940.**XX**

Dim-to-warm - 9.4W - 603lm 1073.**AA**.26.DTW.**XX**

Mains dim - Driver 490.27.20 (standard) or 497.27.20 (dim-to-warm) incl.

2700K - Ra90 - 10.2W - 772lm 1073.**AA**.27.927.**XX**

3000K - Ra90 - 10.2W - 811lm 1073.**AA**.27.930.**XX**

4000K - Ra90 - 10.2W - 822lm 1073.**AA**.27.940.**XX**

Dim-to-warm - 9.4W - 603lm 1073.**AA**.27.DTW.**XX**

29° Reflector: 0000.**29**.00.000.00

40° Reflector: 0000.**40**.00.000.00

51° Reflector: 0000.**51**.00.000.00

01



White Matt Text.
Standard

18



Grey Matt Text.
Standard

03



Black Matt Text.
Standard

05



White + Black
Standard

11



Black + Gold Matt

16



Gold Matt



Tektus 60 Recessed **NEW!**

PRICES INCL. DRIVERS

Non dim 350mA/500mA - Adjustable driver 493.24.22 incl.

2700K - Ra90 - 995lm / 1390lm 1075.**AA**.24.927.**XX**

3000K - Ra90 - 1035lm / 1445lm 1075.**AA**.24.930.**XX**

4000K - Ra90 - 1050lm / 1467lm 1075.**AA**.24.940.**XX**

1-10V dim & Push dim 350/500mA - Adjustable driver 490.25.20 incl.

2700K - Ra90 - 995lm / 1390lm 1075.**AA**.25.927.**XX**

3000K - Ra90 - 1035lm / 1445lm 1075.**AA**.25.930.**XX**

4000K - Ra90 - 1050lm / 1467lm 1075.**AA**.25.940.**XX**

DALI dim 350/500mA - Adjustable driver 490.26.20 incl.

2700K - Ra90 - 995lm / 1390lm 1075.**AA**.26.927.**XX**

3000K - Ra90 - 1035lm / 1445lm 1075.**AA**.26.930.**XX**

4000K - Ra90 - 1050lm / 1467lm 1075.**AA**.26.940.**XX**

Mains dim 350/500mA - Adjustable driver 493.27.20 incl.

2700K - Ra90 - 995lm / 1390lm 1075.**AA**.27.927.**XX**

3000K - Ra90 - 1035lm / 1445lm 1075.**AA**.27.930.**XX**

4000K - Ra90 - 1050lm / 1467lm 1075.**AA**.27.940.**XX**

23° Reflector: 0000.**23**.00.000.00

36° Reflector: 0000.**36**.00.000.00

48° Reflector: 0000.**48**.00.000.00

57° Reflector: 0000.**57**.00.000.00

Available colors: 0000.00.00.000.**XX**

Other RAL colors on request

NEW Tektus Telescopic

Type	Spot-/Downlight
Mounting	Recessed
Material	Aluminium
Adjustable	Yes (60°/359°)
El. class / IP	Class III / IP20
El. class driver	Class II
Warranty:	see p.308

Tektus 45: Bridgelux Vero 10 LED (350mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90 (Ra80 on request)
SDCM	3
Luminous Flux LED	2700K - Ra90: 1100lm (124lm/W) 3000K - Ra90: 1156lm (130lm/W) 4000K - Ra90: 1072lm (132lm/W)
Luminous Flux System	2700K - Ra90: 772lm (76lm/W) 3000K - Ra90: 811lm (80lm/W) 4000K - Ra90: 822lm (81lm/W)
Beam angle	29° / 40° / 51°
LED Power	8.9W / 350mA (excl. driver)
System Power	10.2W / 350mA (incl. driver)
Forward voltage	23V (min.) - 25.5V (typ.) - 28V (max.)

Tektus 45: Bridgelux Dim-to-warm LED (250mA)


CCT	Dim-to-warm 1800-3000K
CRI	Ra90
Luminous Flux LED	860lm - System: 603lm
LED Power	8.2W / 250mA (excl. driver)
System Power	9.4W / 250mA (incl. driver)

Tektus 60: Citizen CLU LED (350mA/500mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90
SDCM	3
Luminous flux LED (350/500mA)	2700K - Ra90: 1517lm (350mA) / 2118lm (500mA) 3000K - Ra90: 1577lm (350mA) / 2202lm (500mA) 4000K - Ra90: 1601lm (350mA) / 2236lm (500mA)
Luminous Flux System	2700K - Ra90: 995lm (350mA) / 1390lm (500mA) 3000K - Ra90: 1035lm (350mA) / 1445lm (500mA) 4000K - Ra90: 1050lm (350mA) / 1467lm (500mA)
Beam angle	23° / 36° / 48° / 57°
LED Power	11.3W / 350mA or 16.5W / 500mA (excl. driver)
System Power	12.9W / 350mA or 19.0W / 500mA (incl. driver)
Forward voltage	29.3V (min.) - 32.6V (typ.) - 33.6V (max.)



Tektus 45: Ø70mm
Tektus 60: Ø82mm

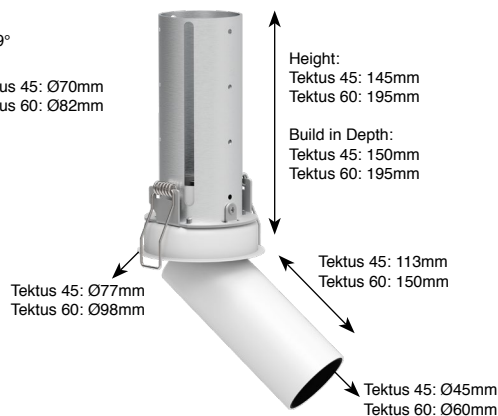

Driver:
- Included in article number and included in price
- External/Remote installation

Data sheets and wiring guide: see website
Driver information: see p.294-295

On Request
Bridgelux Vero10 CRI Ra97

Air circulation notice:
Do not toplot with insulation materials

LED Power	3.0W (excl. driver)
System Power	3.4W (incl. driver)

Tektus telescopic is equipped with a retractable spot cilinder system which is fully oriëntable when completely retracted



Tektus 45 Telescopic **NEW!**

PRICES INCL. DRIVERS

Non dim - Driver 490.24.16 incl.

2700K - Ra90 - 10.2W - 772lm

3000K - Ra90 - 10.2W - 811lm

4000K - Ra90 - 10.2W - 822lm

1074.AA.24.927.XX

1074.AA.24.930.XX

1074.AA.24.940.XX

1-10V dim & Push dim - Driver 490.25.20 incl.

2700K - Ra90 - 10.2W - 772lm

3000K - Ra90 - 10.2W - 811lm

4000K - Ra90 - 10.2W - 822lm

1074.AA.25.927.XX

1074.AA.25.930.XX

1074.AA.25.940.XX

DALI dim - Driver 490.26.20 incl.

2700K - Ra90 - 10.2W - 772lm

3000K - Ra90 - 10.2W - 811lm

4000K - Ra90 - 10.2W - 822lm

Dim-to-warm - 9.4W - 603lm

1074.AA.26.927.XX

1074.AA.26.930.XX

1074.AA.26.940.XX

1074.AA.26.DTW.XX

Mains dim - Driver 490.27.20 (standard) or 497.27.20 (dim-to-warm) incl.

2700K - Ra90 - 10.2W - 772lm

3000K - Ra90 - 10.2W - 811lm

4000K - Ra90 - 10.2W - 822lm

Dim-to-warm - 9.4W - 603lm

1074.AA.27.927.XX

1074.AA.27.930.XX

1074.AA.27.940.XX

1074.AA.27.DTW.XX

29° Reflector: 0000.29.00.000.00

40° Reflector: 0000.40.00.000.00

51° Reflector: 0000.51.00.000.00

01



White Matt Text.
Standard

18



Grey Matt Text.
Standard

03



Black Matt Text.
Standard

05



White + Black
Standard

11



Black + Gold Matt

16



Gold Matt



Tektus 60 Telescopic **NEW!**

PRICES INCL. DRIVERS

Non dim 350mA/500mA - Adjustable driver 493.24.22 incl.

2700K - Ra90 - 995lm / 1390lm

3000K - Ra90 - 1035lm / 1445lm

4000K - Ra90 - 1050lm / 1467lm

1076.AA.24.927.XX

1076.AA.24.930.XX

1076.AA.24.940.XX

1-10V dim & Push dim 350/500mA - Adjustable driver 490.25.20 incl.

2700K - Ra90 - 995lm / 1390lm

3000K - Ra90 - 1035lm / 1445lm

4000K - Ra90 - 1050lm / 1467lm

1076.AA.25.927.XX

1076.AA.25.930.XX

1076.AA.25.940.XX

DALI dim 350/500mA - Adjustable driver 490.26.20 incl.

2700K - Ra90 - 995lm / 1390lm

3000K - Ra90 - 1035lm / 1445lm

4000K - Ra90 - 1050lm / 1467lm

1076.AA.26.927.XX

1076.AA.26.930.XX

1076.AA.26.940.XX

Mains dim 350/500mA - Adjustable driver 493.27.20 incl.

2700K - Ra90 - 995lm / 1390lm

3000K - Ra90 - 1035lm / 1445lm

4000K - Ra90 - 1050lm / 1467lm

1076.AA.27.927.XX

1076.AA.27.930.XX

1076.AA.27.940.XX

23° Reflector: 0000.23.00.000.00

36° Reflector: 0000.36.00.000.00

48° Reflector: 0000.48.00.000.00

57° Reflector: 0000.57.00.000.00

Available colors: 0000.00.00.000.XX

Other RAL colors on request

NEW Tektus Round 1-Way

Type	Spot-/Downlight
Mounting	Surface Mounted
Material	Luminaire: Aluminium+Steel Marble finish: Polyester+Aluminium Hydroxide
Adjustable	Yes (60°/359°)
El. class / IP	Class I / IP20
Warranty:	see p.308

Tektus 45: Bridgelux Vero 10 LED (350mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90 (Ra80 on request)
SDCM	3
Luminous Flux LED	2700K - Ra90: 1100lm (124lm/W) 3000K - Ra90: 1156lm (130lm/W) 4000K - Ra90: 1072lm (132lm/W)
Luminous Flux System	2700K - Ra90: 772lm (76lm/W) 3000K - Ra90: 811lm (80lm/W) 4000K - Ra90: 822lm (81lm/W)
Beam angle	29° / 40° / 51°
LED Power	8.9W (excl. driver)
System Power	10.2W (incl. driver)

Tektus 45: Bridgelux Dim-to-warm LED (250mA)


CCT	Dim-to-warm 1800-3000K
CRI	Ra90
Luminous Flux LED	LED: 860lm - System: 603lm
LED Power	8.2W (excl. driver)
System Power	9.4W (incl. driver)

Tektus 60: Citizen CLU LED (350mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90
SDCM	3
Luminous flux LED	2700K - Ra90: 1517lm (134lm/W) 3000K - Ra90: 1577lm (140lm/W) 4000K - Ra90: 1601lm (142lm/W)
Luminous Flux System	2700K - Ra90: 995lm (77lm/W) 3000K - Ra90: 1035lm (80lm/W) 4000K - Ra90: 1050lm (81lm/W)
Beam angle	23° / 36° / 48° / 57°
LED Power	11.3W (excl. driver)
System Power	12.9W (incl. driver)



Ø300mm

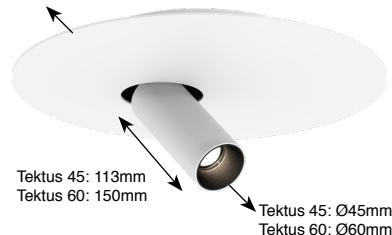

Height:
Tektus 45: 28mm
Tektus 60: 37mm



Driver:

- Included in article number and included in price
- External/Remote installation

Data sheets and wiring guide: see website

Driver information: see p.294-295

Indirect lighting not available for Tektus 1-Way

On Request

Bridgelux Vero10 CRI Ra97



Tektus 45 Round 1-Way

Diameter 300

PRICES INCL. DRIVERS

Non dim

2700K - Ra90 - 10.2W - 772lm
3000K - Ra90 - 10.2W - 811lm
4000K - Ra90 - 10.2W - 822lm

1124.AA.24.927.XX
1124.AA.24.930.XX
1124.AA.24.940.XX

1-10V & Push dim

2700K - Ra90 - 10.2W - 772lm
3000K - Ra90 - 10.2W - 811lm
4000K - Ra90 - 10.2W - 822lm

1124.AA.25.927.XX
1124.AA.25.930.XX
1124.AA.25.940.XX

DALI dim

2700K - Ra90 - 10.2W - 772lm
3000K - Ra90 - 10.2W - 811lm
4000K - Ra90 - 10.2W - 822lm
Dim-to-warm - 9.4W - 603lm

1124.AA.26.927.XX
1124.AA.26.930.XX
1124.AA.26.940.XX
1124.AA.26.DTW.XX


Mains dim

2700K - Ra90 - 10.2W - 772lm
3000K - Ra90 - 10.2W - 811lm
4000K - Ra90 - 10.2W - 822lm
Dim-to-warm - 9.4W - 603lm

1124.AA.27.927.XX
1124.AA.27.930.XX
1124.AA.27.940.XX
1124.AA.27.DTW.XX

29° Reflector: 0000.29.00.000.00
40° Reflector: 0000.40.00.000.00
51° Reflector: 0000.51.00.000.00

Asymmetric position:



Tektus 60 Round 1-Way

Diameter 300

PRICES INCL. DRIVERS

Non dim

2700K - Ra90 - 12.9W - 995lm
3000K - Ra90 - 12.9W - 1035lm
4000K - Ra90 - 12.9W - 1050lm

1125.AA.24.927.XX
1125.AA.24.930.XX
1125.AA.24.940.XX

1-10V & Push dim

2700K - Ra90 - 12.9W - 995lm
3000K - Ra90 - 12.9W - 1035lm
4000K - Ra90 - 12.9W - 1050lm

1125.AA.25.927.XX
1125.AA.25.930.XX
1125.AA.25.940.XX

DALI dim

2700K - Ra90 - 12.9W - 995lm
3000K - Ra90 - 12.9W - 1035lm
4000K - Ra90 - 12.9W - 1050lm

1125.AA.26.927.XX
1125.AA.26.930.XX
1125.AA.26.940.XX

Mains dim

2700K - Ra90 - 12.9W - 995lm
3000K - Ra90 - 12.9W - 1035lm
4000K - Ra90 - 12.9W - 1050lm

1125.AA.27.927.XX
1125.AA.27.930.XX
1125.AA.27.940.XX

23° Reflector: 0000.23.00.000.00
36° Reflector: 0000.36.00.000.00
48° Reflector: 0000.48.00.000.00
57° Reflector: 0000.57.00.000.00


Available colors: 0000.00.00.000.XX*

Other RAL colors on request.


Marble look finish look is unique and will vary for each individual luminaire.



01
White Matt Text.
Standard




05
White + Black
Standard




12
White + Gold Matt



03
Black Matt Text.
Standard




11
Black + Gold Matt



33
Marble Look + White



34
Marble Look + Black



35
Marble Look + Gold

NEW Tektus Square 1-Way

Type	Spot-/Downlight
Mounting	Surface Mounted
Material	Luminaire: Aluminium+Steel Marble finish: Polyester+Aluminium Hydroxide
Adjustable	Yes (60°/359°)
El. class / IP	Class I / IP20
Warranty:	see p.308

Tektus 45: Bridgelux Vero 10 LED (350mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90 (Ra80 on request)
SDCM	3
Luminous Flux LED	2700K - Ra90: 1100lm (124lm/W) 3000K - Ra90: 1156lm (130lm/W) 4000K - Ra90: 1072lm (132lm/W)
Luminous Flux System	2700K - Ra90: 772lm (76lm/W) 3000K - Ra90: 811lm (80lm/W) 4000K - Ra90: 822lm (81lm/W)
Beam angle	29° / 40° / 51°
LED Power	8.9W (excl. driver)
System Power	10.2W (incl. driver)

Tektus 45: Bridgelux Dim-to-warm LED (250mA)


CCT	Dim-to-warm 1800-3000K
CRI	Ra90
Luminous Flux LED	LED: 860lm - System: 603lm
LED Power	8.2W (excl. driver)
System Power	9.4W (incl. driver)

Tektus 60: Citizen CLU LED (350mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90
SDCM	3
Luminous flux LED	2700K - Ra90: 1517lm (134lm/W) 3000K - Ra90: 1577lm (140lm/W) 4000K - Ra90: 1601lm (142lm/W)
Luminous Flux System	2700K - Ra90: 995lm (77lm/W) 3000K - Ra90: 1035lm (80lm/W) 4000K - Ra90: 1050lm (81lm/W)
Beam angle	23° / 36° / 48° / 57°
LED Power	11.3W (excl. driver)
System Power	12.9W (incl. driver)



Tektus 45: 262x262mm
Tektus 60: 312x312mm

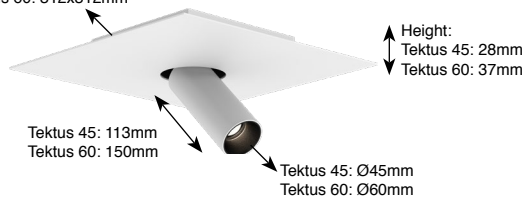


Driver:
- Included in article number and included in price
- External/Remote installation

Data sheets and wiring guide: see website
Driver information: see p.294-295

Indirect lighting not available for Tektus 1-Way

On Request
Bridgelux Vero10 CRI Ra97

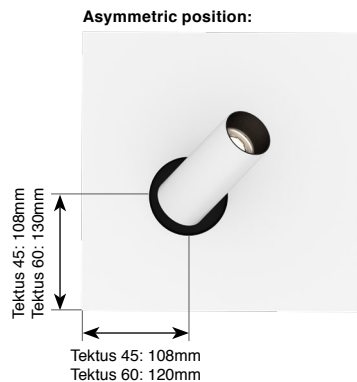

Tektus 45 Square 1-Way **NEW!**

Surface Mounted

PRICES INCL. DRIVERS

Non dim

2700K - Ra90 - 10.2W - 772lm
3000K - Ra90 - 10.2W - 811lm
4000K - Ra90 - 10.2W - 822lm

1092.AA.24.927.XX
1092.AA.24.930.XX
1092.AA.24.940.XX

1-10V & Push dim

2700K - Ra90 - 10.2W - 772lm
3000K - Ra90 - 10.2W - 811lm
4000K - Ra90 - 10.2W - 822lm

1092.AA.25.927.XX
1092.AA.25.930.XX
1092.AA.25.940.XX

DALI dim

2700K - Ra90 - 10.2W - 772lm
3000K - Ra90 - 10.2W - 811lm
4000K - Ra90 - 10.2W - 822lm
Dim-to-warm - 9.4W - 603lm

1092.AA.26.927.XX
1092.AA.26.930.XX
1092.AA.26.940.XX
1092.AA.26.DTW.XX

Mains dim

2700K - Ra90 - 10.2W - 772lm
3000K - Ra90 - 10.2W - 811lm
4000K - Ra90 - 10.2W - 822lm
Dim-to-warm - 9.4W - 603lm

1092.AA.27.927.XX
1092.AA.27.930.XX
1092.AA.27.940.XX
1092.AA.27.DTW.XX

29° Reflector: 0000.29.00.000.00
40° Reflector: 0000.40.00.000.00
51° Reflector: 0000.51.00.000.00



Tektus 60 Square 1-Way **NEW!**

Surface Mounted

PRICES INCL. DRIVERS

Non dim

2700K - Ra90 - 12.9W - 995lm
3000K - Ra90 - 12.9W - 1035lm
4000K - Ra90 - 12.9W - 1050lm

1093.AA.24.927.XX
1093.AA.24.930.XX
1093.AA.24.940.XX

1-10V & Push dim

2700K - Ra90 - 12.9W - 995lm
3000K - Ra90 - 12.9W - 1035lm
4000K - Ra90 - 12.9W - 1050lm

1093.AA.25.927.XX
1093.AA.25.930.XX
1093.AA.25.940.XX

DALI dim

2700K - Ra90 - 12.9W - 995lm
3000K - Ra90 - 12.9W - 1035lm
4000K - Ra90 - 12.9W - 1050lm

1093.AA.26.927.XX
1093.AA.26.930.XX
1093.AA.26.940.XX

Mains dim

2700K - Ra90 - 12.9W - 995lm
3000K - Ra90 - 12.9W - 1035lm
4000K - Ra90 - 12.9W - 1050lm


1093.AA.27.927.XX
1093.AA.27.930.XX
1093.AA.27.940.XX

23° Reflector: 0000.23.00.000.00
36° Reflector: 0000.36.00.000.00
48° Reflector: 0000.48.00.000.00
57° Reflector: 0000.57.00.000.00


Available colors: 0000.00.00.000.XX*

Other RAL colors on request.


Marble look finish look is unique and will vary for each individual luminaire.



01
White Matt Text.
Standard




05
White + Black
Standard



12
White + Gold Matt



03
Black Matt Text.
Standard



11
Black + Gold Matt



33
Marble Look + White



34
Marble Look + Black



35
Marble Look + Gold



Tektus 45

Rectangle / Square

Type Spot-/Downlight
Mounting Surface mounted
Material Luminaire:Aluminium+Steel
Marble finish: Polyester+Aluminium HydroxideAd-
justable Yes (60°/359°)
El. class / IP Class I / IP20
Warranty: see p.308

Tektus 45: Bridgelux Vero 10 LED (350mA)

CCT 2700K / 3000K / 4000K
CRI Ra90 (Ra80 on request)
SDCM 3
Luminous Flux LED
2700K - Ra90: 1100lm (124lm/W)
3000K - Ra90: 1156lm (130lm/W)
4000K - Ra90: 1072lm (132lm/W)
Luminous Flux System
2700K - Ra90: 772lm (76lm/W)
3000K - Ra90: 811lm (80lm/W)
4000K - Ra90: 822lm (81lm/W)
Beam angle 29° / 40° / 51°
LED Power 8.9W (excl. driver)
System Power 10.2W (incl. driver)

Tektus 45: Bridgelux Dim-to-warm LED (250mA)

CCT Dim-to-warm 1800-3000K
CRI Ra90
Luminous Flux LED: 860lm - System: 603lm
LED Power 8.2W (excl. driver)
System Power 9.4W (incl. driver)



On Request

Tektus 45 Rectangle 2-Way in CRI Ra97
Tektus 45 Rectangle/Square 3-Way in CRI Ra97

Ceiling mounting on horizontal ceilings only!

Driver:

- integrated in luminaire
- included in article number and price

Data sheets and wiring guide: see website




Tektus 45 Rectangle 2-Way: 262x462mm
Tektus 45 Rectangle 3-Way: 262x562mm
Tektus 45 Square 3-Way: 462x462mm

Ø45mm x 113mm

Height:
28mm

Weights	Standard	Marble Look
1077.xx.xx.xxx.xx	2300g	3600g
1078.xx.xx.xxx.xx	3500g	5100g
1079.xx.xx.xxx.xx	5200g	7700g

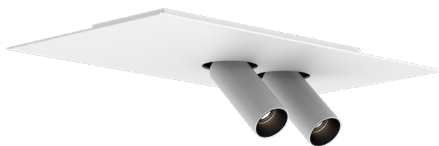

Tektus 45 Rectangle 2-Way **NEW!**

Surface Mounted

PRICES INCL. DRIVERS

Non dim

(2x) 2700K - Ra90 - 10.2W - 772lm	1077.AA.24.927.XX
(2x) 3000K - Ra90 - 10.2W - 811lm	1077.AA.24.930.XX
(2x) 4000K - Ra90 - 10.2W - 822lm	1077.AA.24.940.XX

Touch & DALI dim

(2x) 2700K - Ra90 - 10.2W - 772lm	1077.AA.26.927.XX
(2x) 3000K - Ra90 - 10.2W - 811lm	1077.AA.26.930.XX
(2x) 4000K - Ra90 - 10.2W - 822lm	1077.AA.26.940.XX
(2x) Dim-to-warm - 9.4W - 603lm	1077.AA.26.DTW.XX

Mains dim

(2x) 2700K - Ra90 - 10.2W - 772lm	1077.AA.27.927.XX
(2x) 3000K - Ra90 - 10.2W - 811lm	1077.AA.27.930.XX
(2x) 4000K - Ra90 - 10.2W - 822lm	1077.AA.27.940.XX
(2x) Dim-to-warm - 9.4W - 603lm	1077.AA.27.DTW.XX



Tektus 45 Rectangle 3-Way **NEW!**

Surface Mounted

PRICES INCL. DRIVERS

Non dim


(3x) 2700K - Ra90 - 10.2W - 772lm	1078.AA.24.927.XX
(3x) 3000K - Ra90 - 10.2W - 811lm	1078.AA.24.930.XX
(3x) 4000K - Ra90 - 10.2W - 822lm	1078.AA.24.940.XX

Touch & DALI dim

(3x) 2700K - Ra90 - 10.2W - 772lm	1078.AA.26.927.XX
(3x) 3000K - Ra90 - 10.2W - 811lm	1078.AA.26.930.XX
(3x) 4000K - Ra90 - 10.2W - 822lm	1078.AA.26.940.XX
(3x) Dim-to-warm - 9.4W - 603lm	1078.AA.26.DTW.XX

Mains dim

(3x) 2700K - Ra90 - 10.2W - 772lm	1078.AA.27.927.XX
(3x) 3000K - Ra90 - 10.2W - 811lm	1078.AA.27.930.XX
(3x) 4000K - Ra90 - 10.2W - 822lm	1078.AA.27.940.XX
(3x) Dim-to-warm - 9.4W - 603lm	1078.AA.27.DTW.XX

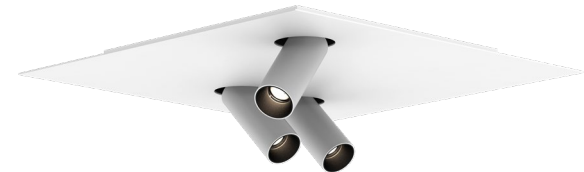

Tektus 45 Square 3-Way **NEW!**

Surface Mounted

PRICES INCL. DRIVERS

Non dim

(3x) 2700K - Ra90 - 10.2W - 772lm	1079.AA.24.927.XX
(3x) 3000K - Ra90 - 10.2W - 811lm	1079.AA.24.930.XX
(3x) 4000K - Ra90 - 10.2W - 822lm	1079.AA.24.940.XX

Touch & DALI dim

(3x) 2700K - Ra90 - 10.2W - 772lm	1079.AA.26.927.XX
(3x) 3000K - Ra90 - 10.2W - 811lm	1079.AA.26.930.XX
(3x) 4000K - Ra90 - 10.2W - 822lm	1079.AA.26.940.XX
(3x) Dim-to-warm - 9.4W - 603lm	1079.AA.26.DTW.XX

Mains dim

(3x) 2700K - Ra90 - 10.2W - 772lm	1079.AA.27.927.XX
(3x) 3000K - Ra90 - 10.2W - 811lm	1079.AA.27.930.XX
(3x) 4000K - Ra90 - 10.2W - 822lm	1079.AA.27.940.XX
(3x) Dim-to-warm - 9.4W - 603lm	1079.AA.27.DTW.XX

29° Reflector: 0000.29.00.000.00
40° Reflector: 0000.40.00.000.00
51° Reflector: 0000.51.00.000.00

Available colors: 0000.00.00.000.XX*

Other RAL colors on request.

Marble look finish look is unique and will vary for each individual luminaire.



01
White Matt Text.
Standard



05
White + Black
Standard



12
White + Gold Matt



03
Black Matt Text.
Standard



11
Black + Gold Matt



33
Marble Look + White



34
Marble Look + Black



35
Marble Look + Gold




Tektus 60

Rectangle / Square

Type Spot-/Downlight
Mounting Surface mounted
Material Luminaire:Aluminium+Steel
Marble finish: Polyester+Aluminium HydroxideAd-
justable Yes (60°/359°)
El. class / IP Class I / IP20
Warranty: see p.308

Tektus 60: Citizen CLU LED (350mA)

CCT 2700K / 3000K / 4000K
CRI Ra90
SDCM 3
Luminous flux LED
2700K - Ra90: 1517lm (134lm/W)
3000K - Ra90: 1577lm (140lm/W)
4000K - Ra90: 1601lm (142lm/W)
Luminous Flux System
2700K - Ra90: 995lm (77lm/W)
3000K - Ra90: 1035lm (80lm/W)
4000K - Ra90: 1050lm (81lm/W)
Beam angle 23° / 36° / 48° / 57°
LED Power 11.3W (excl. driver)
System Power 12.9W (incl. driver)

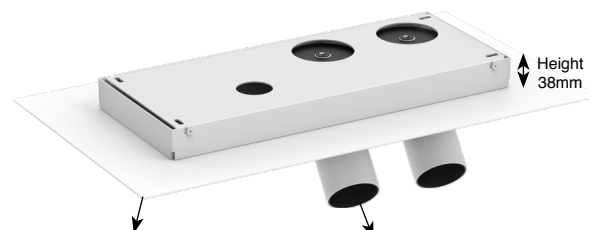

Tektus 60 Rectangle 2-Way: 312x562mm
Tektus 60 Rectangle 3-Way: 312x712mm
Tektus 60 Square 3-Way: 562x562mm

Ø60mm x 150mm

Height
38mm

Ceiling mounting on horizontal ceilings only!

Driver:

- integrated in luminaire
- included in article number and price

Data sheets and wiring guide: see website

Weights

1081.xx.xx.xxx.xx
1080.xx.xx.xxx.xx
1082.xx.xx.xxx.xx

Standard

4200g
4600g
8700g

Marble Look

6100g
7100g
12000g



Tektus 60 Rectangle 2-Way **NEW!**

Surface Mounted

PRICES INCL. DRIVERS

Non dim


(2x) 2700K - Ra90 - 12.9W - 995lm	1081.AA.24.927.XX
(2x) 3000K - Ra90 - 12.9W - 1035lm	1081.AA.24.930.XX
(2x) 4000K - Ra90 - 12.9W - 1050lm	1081.AA.24.940.XX

Touch & DALI dim

(2x) 2700K - Ra90 - 12.9W - 995lm	1081.AA.26.927.XX
(2x) 3000K - Ra90 - 12.9W - 1035lm	1081.AA.26.930.XX
(2x) 4000K - Ra90 - 12.9W - 1050lm	1081.AA.26.940.XX

Mains dim

(2x) 2700K - Ra90 - 12.9W - 995lm	1081.AA.27.927.XX
(2x) 3000K - Ra90 - 12.9W - 1035lm	1081.AA.27.930.XX
(2x) 4000K - Ra90 - 12.9W - 1050lm	1081.AA.27.940.XX

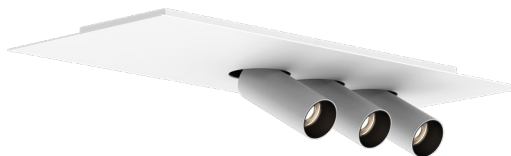

Tektus 60 Rectangle 3-Way **NEW!**

Surface Mounted

PRICES INCL. DRIVERS

Non dim

(3x) 2700K - Ra90 - 12.9W - 995lm	1080.AA.24.927.XX
(3x) 3000K - Ra90 - 12.9W - 1035lm	1080.AA.24.930.XX
(3x) 4000K - Ra90 - 12.9W - 1050lm	1080.AA.24.940.XX

Touch & DALI dim

(3x) 2700K - Ra90 - 12.9W - 995lm	1080.AA.26.927.XX
(3x) 3000K - Ra90 - 12.9W - 1035lm	1080.AA.26.930.XX
(3x) 4000K - Ra90 - 12.9W - 1050lm	1080.AA.26.940.XX

Mains dim

(3x) 2700K - Ra90 - 12.9W - 995lm	1080.AA.27.927.XX
(3x) 3000K - Ra90 - 12.9W - 1035lm	1080.AA.27.930.XX
(3x) 4000K - Ra90 - 12.9W - 1050lm	1080.AA.27.940.XX



Tektus 60 Square 3-Way **NEW!**

Surface Mounted

PRICES INCL. DRIVERS

Non dim

(3x) 2700K - Ra90 - 12.9W - 995lm	1082.AA.24.927.XX
(3x) 3000K - Ra90 - 12.9W - 1035lm	1082.AA.24.930.XX
(3x) 4000K - Ra90 - 12.9W - 1050lm	1082.AA.24.940.XX

Touch & DALI dim

(3x) 2700K - Ra90 - 12.9W - 995lm	1082.AA.26.927.XX
(3x) 3000K - Ra90 - 12.9W - 1035lm	1082.AA.26.930.XX
(3x) 4000K - Ra90 - 12.9W - 1050lm	1082.AA.26.940.XX

Mains dim

(3x) 2700K - Ra90 - 12.9W - 995lm	1082.AA.27.927.XX
(3x) 3000K - Ra90 - 12.9W - 1035lm	1082.AA.27.930.XX
(3x) 4000K - Ra90 - 12.9W - 1050lm	1082.AA.27.940.XX

23° Reflector: 0000.23.00.000.00
 36° Reflector: 0000.36.00.000.00
 48° Reflector: 0000.48.00.000.00
 57° Reflector: 0000.57.00.000.00

Available colors: 0000.00.00.000.XX*
 Other RAL colors on request.

Marble look finish look is unique and will vary for each individual luminaire.



01
White Matt Text.
Standard



05
White + Black
Standard



12
White + Gold Matt



03
Black Matt Text.
Standard



11
Black + Gold Matt



33
Marble Look + White



34
Marble Look + Black



35
Marble Look + Gold

NEW Tektus 45 / Tektus 60 Round D480

Type Spot-/Downlight
Mounting Surface mounted
Material Luminaire: Aluminium+Steel
Marble finish: Polyester+Aluminium Hydroxide Adjustable

Yes (60°/359°)
El. class / IP Class I / IP20
Warranty: see p.308

Tektus 45: Bridgelux Vero 10 LED (350mA)


CCT 2700K / 3000K / 4000K
CRI Ra90 (Ra80 on request)
SDCM 3
Luminous Flux LED
2700K - Ra90: 1100lm (124lm/W)
3000K - Ra90: 1156lm (130lm/W)
4000K - Ra90: 1072lm (132lm/W)
Luminous Flux System
2700K - Ra90: 772lm (76lm/W)
3000K - Ra90: 811lm (80lm/W)
4000K - Ra90: 822lm (81lm/W)
Beam angle 29° / 40° / 51°
LED Power 8.9W (excl. driver)
System Power 10.2W (incl. driver)

Tektus 45: Bridgelux Dim-to-warm LED (250mA)

CCT Dim-to-warm 1800-3000K
CRI Ra90
Luminous Flux LED: 860lm - System: 603lm
LED Power 8.2W (excl. driver)
System Power 9.4W (incl. driver)

Tektus 60: Citizen CLU LED (350mA)

CCT 2700K / 3000K / 4000K
CRI Ra90
SDCM 3
Luminous flux LED
2700K - Ra90: 1517lm (134lm/W)
3000K - Ra90: 1577lm (140lm/W)
4000K - Ra90: 1601lm (142lm/W)
Luminous Flux System
2700K - Ra90: 995lm (77lm/W)
3000K - Ra90: 1035lm (80lm/W)
4000K - Ra90: 1050lm (81lm/W)
Beam angle 23° / 36° / 48° / 57°
LED Power 11.3W (excl. driver)
System Power 12.9W (incl. driver)

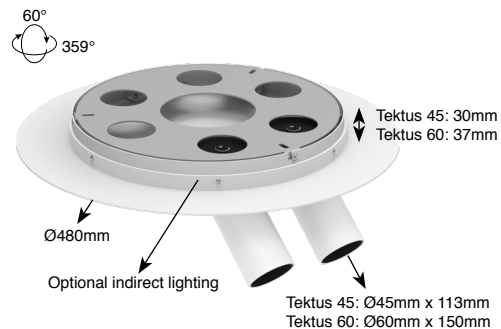

Weights	Standard	Marble Look
1084.xx.xx.xxx.xx	4100g	6200g
1085.xx.xx.xxx.xx	4200g	6300g
1088.xx.xx.xxx.xx	4300g	6300g



Ceiling mounting on horizontal ceilings only!

Driver:
- integrated in luminaire
- included in article number and price

Data sheets and wiring guide: see website

Options

Indirect lighting - Tektus D480

Non dimmable 1084.24.CCC
DALI dimmable* 1084.26.CCC
Mains dimmable 1084.27.CCC

*Not compatible with touch


2700K Ra90: 0000.00.927
3000K Ra90: 0000.00.930
4000K Ra90: 0000.00.940

On Request

Tektus 45 Round 2-Way in CRI Ra97
Tektus 45 Round 3-Way in CRI Ra97
(Only available for Tektus45)

Optional indirect lighting:

Non dim/Mains dim: separate circuits for spots and indirect lighting
DALI dim: separate DALI address for spots and indirect lighting

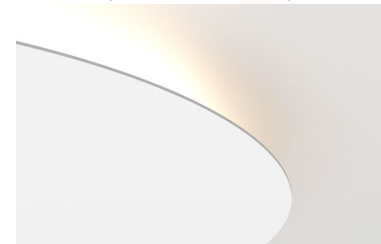



Tektus 45 Round 2-Way NEW!

Diameter 480 (Small)

PRICES INCL. DRIVERS

Non dim

(2x)2700K - Ra90 - 10.2W - 772lm 1084.AA.24.927.XX
(2x)3000K - Ra90 - 10.2W - 811lm 1084.AA.24.930.XX
(2x)4000K - Ra90 - 10.2W - 822lm 1084.AA.24.940.XX

Touch & DALI dim

(2x)2700K - Ra90 - 10.2W - 772lm 1084.AA.26.927.XX
(2x)3000K - Ra90 - 10.2W - 811lm 1084.AA.26.930.XX
(2x)4000K - Ra90 - 10.2W - 822lm 1084.AA.26.940.XX
(2x)Dim-to-warm - 9.4W - 603lm 1084.AA.26.DTW.XX

Mains dim

(2x)2700K - Ra90 - 10.2W - 772lm 1084.AA.27.927.XX
(2x)3000K - Ra90 - 10.2W - 811lm 1084.AA.27.930.XX
(2x)4000K - Ra90 - 10.2W - 822lm 1084.AA.27.940.XX
(2x)Dim-to-warm - 9.4W - 603lm 1084.AA.27.DTW.XX

29° Reflector: 0000.29.00.000.00
40° Reflector: 0000.40.00.000.00
51° Reflector: 0000.51.00.000.00

01



White Matt Text.
Standard

05



White + Black
Standard

12



White + Gold Matt

03




Black Matt Text.
Standard

11



Black + Gold Matt

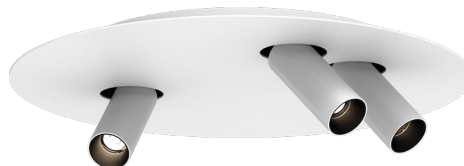

Tektus 45 Round 3-Way NEW!

Diameter 480 (Small)

PRICES INCL. DRIVERS

Non dim

(3x)2700K - Ra90 - 10.2W - 772lm 1085.AA.24.927.XX
(3x)3000K - Ra90 - 10.2W - 811lm 1085.AA.24.930.XX
(3x)4000K - Ra90 - 10.2W - 822lm 1085.AA.24.940.XX

Touch & DALI dim

(3x)2700K - Ra90 - 10.2W - 772lm 1085.AA.26.927.XX
(3x)3000K - Ra90 - 10.2W - 811lm 1085.AA.26.930.XX
(3x)4000K - Ra90 - 10.2W - 822lm 1085.AA.26.940.XX
(3x)Dim-to-warm - 9.4W - 603lm 1085.AA.26.DTW.XX

Mains dim

(3x)2700K - Ra90 - 10.2W - 772lm 1085.AA.27.927.XX
(3x)3000K - Ra90 - 10.2W - 811lm 1085.AA.27.930.XX
(3x)4000K - Ra90 - 10.2W - 822lm 1085.AA.27.940.XX
(3x)Dim-to-warm - 9.4W - 603lm 1085.AA.27.DTW.XX

29° Reflector: 0000.29.00.000.00
40° Reflector: 0000.40.00.000.00
51° Reflector: 0000.51.00.000.00



Tektus 60 Round 2-Way NEW!

Diameter 480 (Small)

PRICES INCL. DRIVERS

Non dim

(2x)2700K - Ra90 - 12.9W - 995lm 1088.AA.24.927.XX
(2x)3000K - Ra90 - 12.9W - 1035lm 1088.AA.24.930.XX
(2x)4000K - Ra90 - 12.9W - 1050lm 1088.AA.24.940.XX

Touch & DALI dim

(2x)2700K - Ra90 - 12.9W - 995lm 1088.AA.26.927.XX
(2x)3000K - Ra90 - 12.9W - 1035lm 1088.AA.26.930.XX
(2x)4000K - Ra90 - 12.9W - 1050lm 1088.AA.26.940.XX

Mains dim

(2x)2700K - Ra90 - 12.9W - 995lm 1088.AA.27.927.XX
(2x)3000K - Ra90 - 12.9W - 1035lm 1088.AA.27.930.XX
(2x)4000K - Ra90 - 12.9W - 1050lm 1088.AA.27.940.XX

23° Reflector: 0000.23.00.000.00
36° Reflector: 0000.36.00.000.00
48° Reflector: 0000.48.00.000.00
57° Reflector: 0000.57.00.000.00

Available colors: 0000.00.00.000.XX*

Other RAL colors on request.

Marble look finish look is unique and will vary for each individual luminaire.

33



Marble Look + White

34



Marble Look + Black

35



Marble Look + Gold



Tektus 45 / Tektus 60

Round D640

Type Spot-/Downlight
Mounting Surface mounted
Material Luminaire:Aluminium+Steel
Marble finish: Polyester+Aluminium HydroxideAdjustable

Yes (60°/359°)
El. class / IP Class I / IP20
Warranty: see p.308

Tektus 45: Bridgelux Vero 10 LED (350mA)


CCT 2700K / 3000K / 4000K
CRI Ra90 (Ra80 on request)
SDCM 3
Luminous Flux LED
2700K - Ra90: 1100lm (124lm/W)
3000K - Ra90: 1156lm (130lm/W)
4000K - Ra90: 1072lm (132lm/W)
Luminous Flux System
2700K - Ra90: 772lm (76lm/W)
3000K - Ra90: 811lm (80lm/W)
4000K - Ra90: 822lm (81lm/W)
Beam angle 29° / 40° / 51°
LED Power 8.9W (excl. driver)
System Power 10.2W (incl. driver)

Tektus 45: Bridgelux Dim-to-warm LED (250mA)

CCT Dim-to-warm 1800-3000K
CRI Ra90
Luminous Flux LED: 860lm - System: 603lm
LED Power 8.2W (excl. driver)
System Power 9.4W (incl. driver)

Tektus 60: Citizen CLU LED (350mA)

CCT 2700K / 3000K / 4000K
CRI Ra90
SDCM 3
Luminous flux LED
2700K - Ra90: 1517lm (134lm/W)
3000K - Ra90: 1577lm (140lm/W)
4000K - Ra90: 1601lm (142lm/W)
Luminous Flux System
2700K - Ra90: 995lm (77lm/W)
3000K - Ra90: 1035lm (80lm/W)
4000K - Ra90: 1050lm (81lm/W)
Beam angle 23° / 36° / 48° / 57°
LED Power 11.3W (excl. driver)
System Power 12.9W (incl. driver)

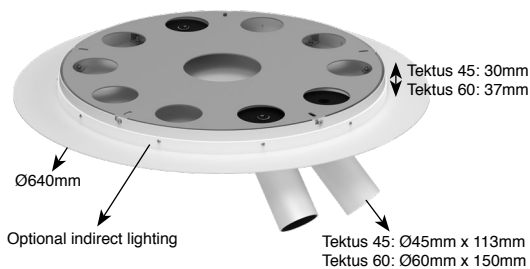

Weights	Standard	Marble Look
1089.xx.xx.xxx.xx	8000g	11600g
1086.xx.xx.xxx.xx	7800g	11400g
1087.xx.xx.xxx.xx	8400g	12000g



Ceiling mounting on horizontal ceilings only!

Driver:

- integrated in luminaire
- included in article number and price

Data sheets and wiring guide: see website

Options

Indirect lighting - Tektus D640

Non dimmable	1089.24.ccc
DALI dimmable*	1089.26.ccc
Mains dimmable	1089.27.ccc

*Not compatible with touch


2700K Ra90:	0000.00.927
3000K Ra90:	0000.00.930
4000K Ra90:	0000.00.940

On Request

Tektus 45 Round 4-Way in CRI Ra97
Tektus 45 Round 5-Way in CRI Ra97
(Only available for Tektus45)

Optional indirect lighting:

Non dim/Mains dim: separate circuits for spots and indirect lighting
DALI dim: separate DALI address for spots and indirect lighting

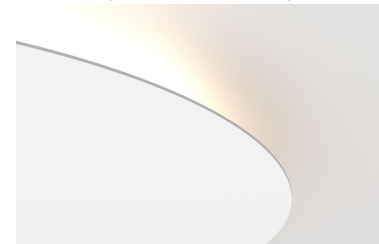



Tektus 60 Round 3-Way **NEW!**

Diameter 640 (Large)

PRICES INCL. DRIVERS

Non dim

(3x) 2700K - Ra90 - 12.9W - 995lm	1089.AA.24.927.XX
(3x) 3000K - Ra90 - 12.9W - 1035lm	1089.AA.24.930.XX
(3x) 4000K - Ra90 - 12.9W - 1050lm	1089.AA.24.940.XX

Touch & DALI dim

(3x) 2700K - Ra90 - 12.9W - 995lm	1089.AA.26.927.XX
(3x) 3000K - Ra90 - 12.9W - 1035lm	1089.AA.26.930.XX
(3x) 4000K - Ra90 - 12.9W - 1050lm	1089.AA.26.940.XX

Mains dim

(3x) 2700K - Ra90 - 12.9W - 995lm	1089.AA.27.927.XX
(3x) 3000K - Ra90 - 12.9W - 1035lm	1089.AA.27.930.XX
(3x) 4000K - Ra90 - 12.9W - 1050lm	1089.AA.27.940.XX

23° Reflector: 0000.23.00.000.00
36° Reflector: 0000.36.00.000.00
48° Reflector: 0000.48.00.000.00
57° Reflector: 0000.57.00.000.00



Tektus 45 Round 4-Way **NEW!**

Diameter 640 (Large)

PRICES INCL. DRIVERS

Non dim

(4x) 2700K - Ra90 - 10.2W - 772lm	1086.AA.24.927.XX
(4x) 3000K - Ra90 - 10.2W - 811lm	1086.AA.24.930.XX
(4x) 4000K - Ra90 - 10.2W - 822lm	1086.AA.24.940.XX

Touch & DALI dim

(4x) 2700K - Ra90 - 10.2W - 772lm	1086.AA.26.927.XX
(4x) 3000K - Ra90 - 10.2W - 811lm	1086.AA.26.930.XX
(4x) 4000K - Ra90 - 10.2W - 822lm	1086.AA.26.940.XX
(4x) Dim-to-warm - 9.4W - 603lm	1086.AA.26.DTW.XX

Mains dim

(4x) 2700K - Ra90 - 10.2W - 772lm	1086.AA.27.927.XX
(4x) 3000K - Ra90 - 10.2W - 811lm	1086.AA.27.930.XX
(4x) 4000K - Ra90 - 10.2W - 822lm	1086.AA.27.940.XX
(4x) Dim-to-warm - 9.4W - 603lm	1086.AA.27.DTW.XX

29° Reflector: 0000.29.00.000.00
40° Reflector: 0000.40.00.000.00
51° Reflector: 0000.51.00.000.00



Tektus 45 Round 5-Way **NEW!**

Diameter 640 (Large)

PRICES INCL. DRIVERS

Non dim

(5x) 2700K - Ra90 - 10.2W - 772lm	1087.AA.24.927.XX
(5x) 3000K - Ra90 - 10.2W - 811lm	1087.AA.24.930.XX
(5x) 4000K - Ra90 - 10.2W - 822lm	1087.AA.24.940.XX

Touch & DALI dim

(5x) 2700K - Ra90 - 10.2W - 772lm	1087.AA.26.927.XX
(5x) 3000K - Ra90 - 10.2W - 811lm	1087.AA.26.930.XX
(5x) 4000K - Ra90 - 10.2W - 822lm	1087.AA.26.940.XX
(5x) Dim-to-warm - 9.4W - 603lm	1087.AA.26.DTW.XX

Mains dim

(5x) 2700K - Ra90 - 10.2W - 772lm	1087.AA.27.927.XX
(5x) 3000K - Ra90 - 10.2W - 811lm	1087.AA.27.930.XX
(5x) 4000K - Ra90 - 10.2W - 822lm	1087.AA.27.940.XX
(5x) Dim-to-warm - 9.4W - 603lm	1087.AA.27.DTW.XX

29° Reflector: 0000.29.00.000.00
40° Reflector: 0000.40.00.000.00
51° Reflector: 0000.51.00.000.00

Available colors: 0000.00.00.000.XX*

Other RAL colors on request.

Marble look finish look is unique and will vary for each individual luminaire.



01
White Matt Text.
Standard



05
White + Black
Standard



12
White + Gold Matt



03
Black Matt Text.
Standard



11
Black + Gold Matt



33
Marble Look + White



34
Marble Look + Black



35
Marble Look + Gold











Tektus 45 / Tektus 60

3-Phase

Type	Spot-/Downlight
Mounting	Surface mounted
Material	Aluminium
Adjustable	Yes (60°/359°)
El. class / IP	Class I / IP20
Warranty: see p.308	

Tektus 45: Bridgelux Vero 10 LED (350mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90 (Ra80 on request)
SDCM	3
Luminous Flux LED	2700K - Ra90: 1100lm (124lm/W) 3000K - Ra90: 1156lm (130lm/W) 4000K - Ra90: 1072lm (132lm/W)
Luminous Flux System	2700K - Ra90: 772lm (76lm/W) 3000K - Ra90: 811lm (80lm/W) 4000K - Ra90: 822lm (81lm/W)
Beam angle	29° / 40° / 51°
LED Power	8.9W (excl. driver)
System Power	10.2W (incl. driver)

Tektus 60: Citizen CLU LED (350mA/500mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90
SDCM	3
Luminous flux LED (350/500mA)	2700K - Ra90: 1517lm (350mA) / 2118lm (500mA) 3000K - Ra90: 1577lm (350mA) / 2202lm (500mA) 4000K - Ra90: 1601lm (350mA) / 2236lm (500mA)
Luminous Flux System	2700K - Ra90: 995lm (350mA) / 1390lm (500mA) 3000K - Ra90: 1035lm (350mA) / 1445lm (500mA) 4000K - Ra90: 1050lm (350mA) / 1467lm (500mA)
Beam angle	23° / 36° / 48° / 57°
LED Power	11.3W / 350mA or 16.5W / 500mA (excl. driver)
System Power	12.9W / 350mA or 19.0W / 500mA (incl. driver)



Mounting on horizontal tracks only!

Driver:

- integrated in luminaire
- included in article number and price

Data sheets and wiring guide: see website

On Request

Bridgelux Vero10 CRI Ra97
(Only available for Tektus45)



Tektus 45 NEW!

3-Phase

PRICES INCL. DRIVERS

Non dim (universal adapter)

2700K - Ra90 - 10.2W - 772lm	1090.AA.24.927.XX
3000K - Ra90 - 10.2W - 811lm	1090.AA.24.930.XX
4000K - Ra90 - 10.2W - 822lm	1090.AA.24.940.XX

DALI dim (Compatible with Global Trac Pulse & Stucchi One Track)

2700K - Ra90 - 10.2W - 772lm	1090.AA.26.927.XX
3000K - Ra90 - 10.2W - 811lm	1090.AA.26.930.XX
4000K - Ra90 - 10.2W - 822lm	1090.AA.26.940.XX

29° Reflector: 0000.29.00.000.00
40° Reflector: 0000.40.00.000.00
51° Reflector: 0000.51.00.000.00



Tektus 60 NEW!

3-Phase - 350mA

PRICES INCL. DRIVERS

Non dim (universal adapter)

2700K - Ra90 - 12.9W - 995lm	1091.AA.24.927.XX
3000K - Ra90 - 12.9W - 1035lm	1091.AA.24.930.XX
4000K - Ra90 - 12.9W - 1050lm	1091.AA.24.940.XX

DALI dim (Compatible with Global Trac Pulse & Stucchi One Track)

2700K - Ra90 - 12.9W - 995lm	1091.AA.26.927.XX
3000K - Ra90 - 12.9W - 1035lm	1091.AA.26.930.XX
4000K - Ra90 - 12.9W - 1050lm	1091.AA.26.940.XX

23° Reflector: 0000.23.00.000.00
36° Reflector: 0000.36.00.000.00
48° Reflector: 0000.48.00.000.00
57° Reflector: 0000.57.00.000.00



Tektus 60 NEW!

3-Phase - 500mA

PRICES INCL. DRIVERS

Non dim (universal adapter)

2700K - Ra90 - 19.0W - 1390lm	1246.AA.24.927.XX
3000K - Ra90 - 19.0W - 1445lm	1246.AA.24.930.XX
4000K - Ra90 - 19.0W - 1467lm	1246.AA.24.940.XX

DALI dim (Compatible with Global Trac Pulse & Stucchi One Track)

2700K - Ra90 - 19.0W - 1390lm	1246.AA.26.927.XX
3000K - Ra90 - 19.0W - 1445lm	1246.AA.26.930.XX
4000K - Ra90 - 19.0W - 1467lm	1246.AA.26.940.XX

23° Reflector: 0000.23.00.000.00
36° Reflector: 0000.36.00.000.00
48° Reflector: 0000.48.00.000.00
57° Reflector: 0000.57.00.000.00


Available colors: 0000.00.00.000.XX
Other RAL colors on request



01
White Matt Text.
Standard



18
Grey Matt Text.
Standard



03
Black Matt Text.
Standard



16
Gold Matt

NEW Tektus 45 Linear

Type	Linear
Mounting	Suspended
Material	Aluminium
Adjustable	Yes (60°/359°)
El. class / IP	Class I / IP20
CCT	2700K / 3000K / 4000K
CRI	Ra90
SDCM	3
Warranty: see p.308	

Spots: Bridgelux Vero 10 LED (350mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90 (Ra80 on request)
SDCM	3
Luminous Flux LED	2700K - Ra90: 1100lm (124lm/W) 3000K - Ra90: 1156lm (130lm/W) 4000K - Ra90: 1072lm (132lm/W)
Luminous Flux System	2700K - Ra90: 772lm (76lm/W) 3000K - Ra90: 811lm (80lm/W) 4000K - Ra90: 822lm (81lm/W)
Beam angle	29° / 40° / 51°
LED Power	8.9W (excl. driver)
System Power	10.2W (incl. driver)

Linear Module 1800mm

	Direct (down)	Indirect (up)
Luminous Flux LED	2700K - Ra90: 4020lm (168lm/W) 3000K - Ra90: 4160lm (173lm/W) 4000K - Ra90: 4400lm (183lm/W)	4020lm (168lm/W) 4160lm (173lm/W) 4400lm (183lm/W)
Power	Direct (down): 24.0W - Indirect (up): 24.0W (excl. driver)	

Linear Module 2400mm

	Direct (down)	Indirect (up)
Luminous Flux LED	2700K - Ra90: 6030lm (168lm/W) 3000K - Ra90: 6240lm (173lm/W) 4000K - Ra90: 6600lm (183lm/W)	6030lm (168lm/W) 6240lm (173lm/W) 6600lm (183lm/W)
Power	Direct (down): 36.0W - Indirect (up): 36.0W (excl. driver)	



On request

Recessed connecting box (more info on p.300/p.305)

Trimless connecting box (more info on p.300/p.305)

3x Bridgelux Vero10 CRI Ra97


Driver:


- Integrated in luminaire
- included in article number and price

Connection:

- Non dim: 5-wire cable (L1, N, PE, L2, L3). Up, down and spots on separately switchable circuits with common N. If only 3 wires are available, L1, L2 and L3 can be connected together. Separate switching will not be possible.
- DALI: 5-wire cable (L, N, PE, DA1, DA2). Up, down and spots on three separate DALI channels.
- Touch dimmable ON REQUEST (L,N, PA, Touch L1, Touch L2, Touch L3) Up, down and spots on separate circuits with common N.

Data sheets and wiring guide: see website

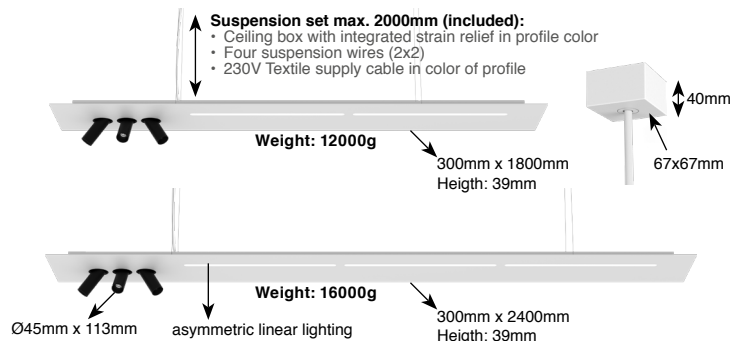

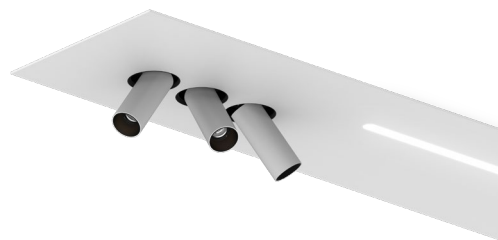

Tektus 45 Linear 1800mm NEW!

3-Way


PRICES INCL. DRIVERS

Linear Module Down 4400lm + 3xTektus 45 Module

2700K - Ra90 - Non dimmable	1608.AA.24.927.XX
2700K - Ra90 - DALI dim.	1608.AA.26.927.XX
3000K - Ra90 - Non dimmable	1608.AA.24.930.XX
3000K - Ra90 - DALI dim.	1608.AA.26.930.XX
4000K - Ra90 - Non dimmable	1608.AA.24.940.XX
4000K - Ra90 - DALI dim.	1608.AA.26.940.XX

Linear Module Up&Down 2x4400lm + 3xTektus 45 Module

2700K - Ra90 - Non dimmable	1601.AA.24.927.XX
2700K - Ra90 - DALI dim.	1601.AA.26.927.XX
3000K - Ra90 - Non dimmable	1601.AA.24.930.XX
3000K - Ra90 - DALI dim.	1601.AA.26.930.XX
4000K - Ra90 - Non dimmable	1601.AA.24.940.XX
4000K - Ra90 - DALI dim.	1601.AA.26.940.XX

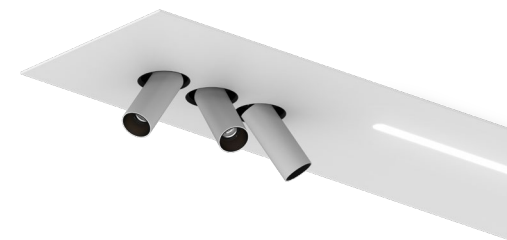

Tektus 45 Linear 2400mm NEW!

3-Way

PRICES INCL. DRIVERS

Linear Module Down 6600lm + 3xTektus 45 Module

2700K - Ra90 - Non dimmable	1602.AA.24.927.XX
2700K - Ra90 - DALI dim.	1602.AA.26.927.XX
3000K - Ra90 - Non dimmable	1602.AA.24.930.XX
3000K - Ra90 - DALI dim.	1602.AA.26.930.XX
4000K - Ra90 - Non dimmable	1602.AA.24.940.XX
4000K - Ra90 - DALI dim.	1602.AA.26.940.XX

Linear Module Up&Down 2x6600lm + 3xTektus 45 Module

2700K - Ra90 - Non dimmable	1603.AA.24.927.XX
2700K - Ra90 - DALI dim.	1603.AA.26.927.XX
3000K - Ra90 - Non dimmable	1603.AA.24.930.XX
3000K - Ra90 - DALI dim.	1603.AA.26.930.XX
4000K - Ra90 - Non dimmable	1603.AA.24.940.XX
4000K - Ra90 - DALI dim.	1603.AA.26.940.XX

29° Reflector: 0000.29.00.000.00
 40° Reflector: 0000.40.00.000.00
 51° Reflector: 0000.51.00.000.00

Available colors: 0000.00.00.000.XX
 Other RAL colors on request

01



White Matt Text.
Standard

05



White + Black
Standard

12



White + Gold Matt

11



Black + Gold Matt

03



Black Matt Text.
Standard

NEW Tektus 60 Linear

Type	Linear
Mounting	Suspended
Material	Aluminium
Adjustable	Yes (60°/359°)
El. class / IP	Class I / IP20
CCT	2700K / 3000K / 4000K
CRI	Ra90
SDCM	3
Warranty:	see p.308

Spots: Citizen CLU LED (350mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90
SDCM	3
Luminous flux LED	2700K - Ra90: 1517lm (134lm/W) 3000K - Ra90: 1577lm (140lm/W) 4000K - Ra90: 1601lm (142lm/W)
Luminous Flux System	2700K - Ra90: 995lm (77lm/W) 3000K - Ra90: 1035lm (80lm/W) 4000K - Ra90: 1050lm (81lm/W)
Beam angle	23° / 36° / 48° / 57°
LED Power	11.3W (excl. driver)
System Power	12.9W (incl. driver)

Linear Module 1800mm

	Direct (down)	Indirect (up)
Luminous Flux LED	2700K - Ra90: 4020lm (168lm/W) 3000K - Ra90: 4160lm (173lm/W) 4000K - Ra90: 4400lm (183lm/W)	4020lm (168lm/W) 4160lm (173lm/W) 4400lm (183lm/W)
Power	Direct (down): 24.0W - Indirect (up): 24.0W (excl. driver)	

Linear Module 2400mm

	Direct (down)	Indirect (up)
Luminous Flux LED	2700K - Ra90: 6030lm (168lm/W) 3000K - Ra90: 6240lm (173lm/W) 4000K - Ra90: 6600lm (183lm/W)	6030lm (168lm/W) 6240lm (173lm/W) 6600lm (183lm/W)
Power	Direct (down): 36.0W - Indirect (up): 36.0W (excl. driver)	



On request

Recessed connecting box (more info on p.300/p.305)

Trimless connecting box (more info on p.300/p.305)


Driver:


- Integrated in luminaire
- Included in article number and price

Connection:

- Non dim: 5-wire cable (L1, N, PE, L2, L3). Up, down and spots on separately switchable circuits with common N. If only 3 wires are available, L1, L2 and L3 can be connected together. Separate switching will not be possible.
- DALI: 5-wire cable (L, N, PE, DA1, DA2). Up, down and spots on three separate DALI channels.
- Touch dimmable ON REQUEST (L, N, PA, Touch L1, Touch L2, Touch L3) Up, down and spots on separate circuits with common N.

Data sheets and wiring guide: see website

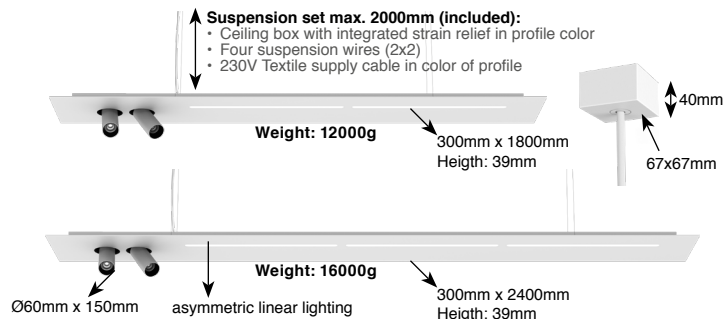

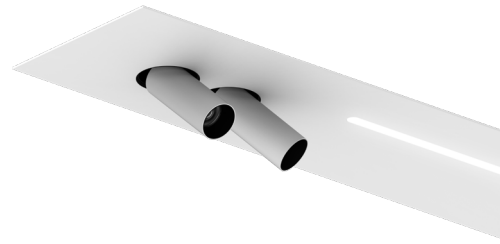

Tektus 60 Linear 1800mm **NEW!**

2-Way


PRICES INCL. DRIVERS

Linear Module Down 4400lm + 2xTektus 60 Module

2700K - Ra90 - Non dimmable	1604. AA.24.927.XX
2700K - Ra90 - DALI dim.	1604. AA.26.927.XX
3000K - Ra90 - Non dimmable	1604. AA.24.930.XX
3000K - Ra90 - DALI dim.	1604. AA.26.930.XX
4000K - Ra90 - Non dimmable	1604. AA.24.940.XX
4000K - Ra90 - DALI dim.	1604. AA.26.940.XX

Linear Module Up&Down 2x4400lm + 2xTektus 60 Module

2700K - Ra90 - Non dimmable	1605. AA.24.927.XX
2700K - Ra90 - DALI dim.	1605. AA.26.927.XX
3000K - Ra90 - Non dimmable	1605. AA.24.930.XX
3000K - Ra90 - DALI dim.	1605. AA.26.930.XX
4000K - Ra90 - Non dimmable	1605. AA.24.940.XX
4000K - Ra90 - DALI dim.	1605. AA.26.940.XX

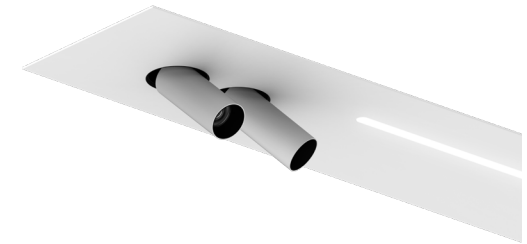

Tektus 60 Linear 2400mm **NEW!**

2-Way

PRICES INCL. DRIVERS

Linear Module Down 6600lm + 2xTektus 60 Module

2700K - Ra90 - Non dimmable	1606. AA.24.927.XX
2700K - Ra90 - DALI dim.	1606. AA.26.927.XX
3000K - Ra90 - Non dimmable	1606. AA.24.930.XX
3000K - Ra90 - DALI dim.	1606. AA.26.930.XX
4000K - Ra90 - Non dimmable	1606. AA.24.940.XX
4000K - Ra90 - DALI dim.	1606. AA.26.940.XX

Linear Module Up&Down 2x6600lm + 2xTektus 60 Module

2700K - Ra90 - Non dimmable	1607. AA.24.927.XX
2700K - Ra90 - DALI dim.	1607. AA.26.927.XX
3000K - Ra90 - Non dimmable	1607. AA.24.930.XX
3000K - Ra90 - DALI dim.	1607. AA.26.930.XX
4000K - Ra90 - Non dimmable	1607. AA.24.940.XX
4000K - Ra90 - DALI dim.	1607. AA.26.940.XX

23° Reflector: 0000.[23.00.000.00](#)
 36° Reflector: 0000.[36.00.000.00](#)
 48° Reflector: 0000.[48.00.000.00](#)
 57° Reflector: 0000.[57.00.000.00](#)

Available colors: 0000.00.00.00.[XX](#)
 Other RAL colors on request

01



White Matt Text.
Standard

05



White + Black
Standard

12




White + Gold Matt

03



Black Matt Text.
Standard

11



Black + Gold Matt

NEW Tektus Spotless Linear


Type	Linear
Mounting	Suspended
Material	Aluminium
Adjustable	No
El. class / IP	Class I / IP20
CCT	2700K / 3000K / 4000K
CRI	Ra90
SDCM	3
Warranty:	see p.308

Linear Module 1440mm

	Direct (down)	Indirect (up)
Luminous Flux LED	2700K - Ra90: 8040lm (168lm/W) 3000K - Ra90: 8320lm (173lm/W) 4000K - Ra90: 8800lm (183lm/W)	2010lm (168lm/W) 2080lm (173lm/W) 2200lm (183lm/W)
Power	Direct (down): 48.0W - Indirect (up): 12.0W (excl. driver)	

Linear Module 2040mm

	Direct (down)	Indirect (up)
Luminous Flux LED	2700K - Ra90: 12060lm (168lm/W) 3000K - Ra90: 12480lm (173lm/W) 4000K - Ra90: 13200lm (183lm/W)	4020lm (168lm/W) 4160lm (173lm/W) 4400lm (183lm/W)
Power	Direct (down): 72.0W - Indirect (up): 24.0W (excl. driver)	



Suspension set max. 2000mm (included):

- Ceiling box with integrated strain relief in profile color
- Four suspension wires (2x2)
- 230V Textile supply cable in color of profile

Weight: 8500g

300mm x 1440mm
Height: 39mm

Weight: 12000g

300mm x 2040mm
Height: 39mm



Driver:

- integrated in luminaire
- included in article number and price

Connection:


- Non dim: 5-wire cable (L1, N, PE, L2, N2). Up and down on separately switchable electrical circuits.
If only 3 wires are available, L1&L1 and N1&N2 can be connected together. Seperate switching will not be possible.
- DALI: 7-wire cable (L, N, PE, DA1, DA1, DA2, DA2). Up and down on two seperate DALI channels.
- Touch: 7-wire cable (L, N, PE, Touch L1, Touch N1, Touch L2, Touch N2). Up and down on two seperate Touch circuits.

Data sheets and wiring guide: see website

On request

Recessed connecting box (more info on p.300/p.305)

Trimless connecting box (more info on p.300/p.305)

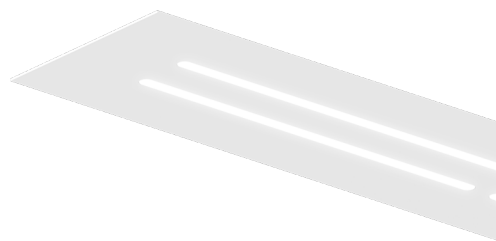

Tektus Linear Spotless **NEW!**

1440mm


PRICES INCL. DRIVERS

Linear Module Down 8800lm

2700K - Ra90 - Non dimmable	1612.00.24.927. XX
2700K - Ra90 - Touch & DALI dim.	1612.00.26.927. XX
3000K - Ra90 - Non dimmable	1612.00.24.930. XX
3000K - Ra90 - Touch & DALI dim.	1612.00.26.930. XX
4000K - Ra90 - Non dimmable	1612.00.24.940. XX
4000K - Ra90 - Touch & DALI dim.	1612.00.26.940. XX

Linear Module Down 8800lm + Linear Module Up 2200lm

2700K - Ra90 - Non dimmable	1609.00.24.927. XX
2700K - Ra90 - Touch & DALI dim.	1609.00.26.927. XX
3000K - Ra90 - Non dimmable	1609.00.24.930. XX
3000K - Ra90 - Touch & DALI dim.	1609.00.26.930. XX
4000K - Ra90 - Non dimmable	1609.00.24.940. XX
4000K - Ra90 - Touch & DALI dim.	1609.00.26.940. XX

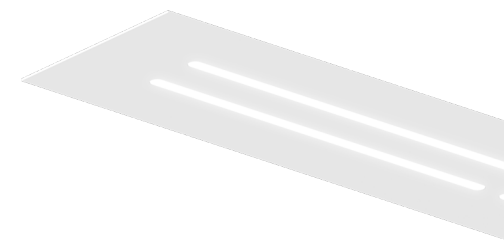

Tektus Linear Spotless **NEW!**

2040mm

PRICES INCL. DRIVERS

Linear Module Down 13200lm

2700K - Ra90 - Non dimmable	1610.00.24.927. XX
2700K - Ra90 - Touch & DALI dim.	1610.00.26.927. XX
3000K - Ra90 - Non dimmable	1610.00.24.930. XX
3000K - Ra90 - Touch & DALI dim.	1610.00.26.930. XX
4000K - Ra90 - Non dimmable	1610.00.24.940. XX
4000K - Ra90 - Touch & DALI dim.	1610.00.26.940. XX

Linear Module Down 13200lm + Linear Module Up 4400lm

2700K - Ra90 - Non dimmable	1611.00.24.927. XX
2700K - Ra90 - Touch & DALI dim.	1611.00.26.927. XX
3000K - Ra90 - Non dimmable	1611.00.24.930. XX
3000K - Ra90 - Touch & DALI dim.	1611.00.26.930. XX
4000K - Ra90 - Non dimmable	1611.00.24.940. XX
4000K - Ra90 - Touch & DALI dim.	1611.00.26.940. XX

Available colors: 0000.00.00.000.**XX**
Other RAL colors on request

01



18



03







NEW Focus
Trimless

Type Downlight
Mounting Trimless
Material Aluminium
Adjustable No
El. class / IP Class III / IP20
El. class driver Class II
Warranty: see p.308

Citizen CLU LED (350mA)

CCT 2700K / 3000K / 4000K
CRI Ra90
SDCM 3

Luminous flux LED
2700K - Ra90: 1517lm (134lm/W)
3000K - Ra90: 1577lm (139lm/W)
4000K - Ra90: 1601lm (142lm/W)


Luminous Flux System
2700K - Ra90: 1289lm (100lm/W)
3000K - Ra90: 1340lm (109lm/W)
4000K - Ra90: 1361lm (111lm/W)

Beam angle 27° / 43°
LED Power 11.3W / 350mA (excl. driver)
System Power 12.9W / 350mA (incl. driver)
Forward voltage 29.3V (min.) - 32.3V (typ.) - 35.1V (max.)




Ø85mm

Trimless gypkit included

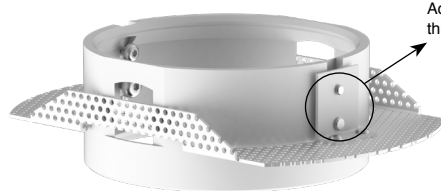


Adjustable ceiling
thickness 9-18mm



Height: 90mm

Build-in depth: 115mm (non dim)
130mm (dimmmable)

Ø85mm

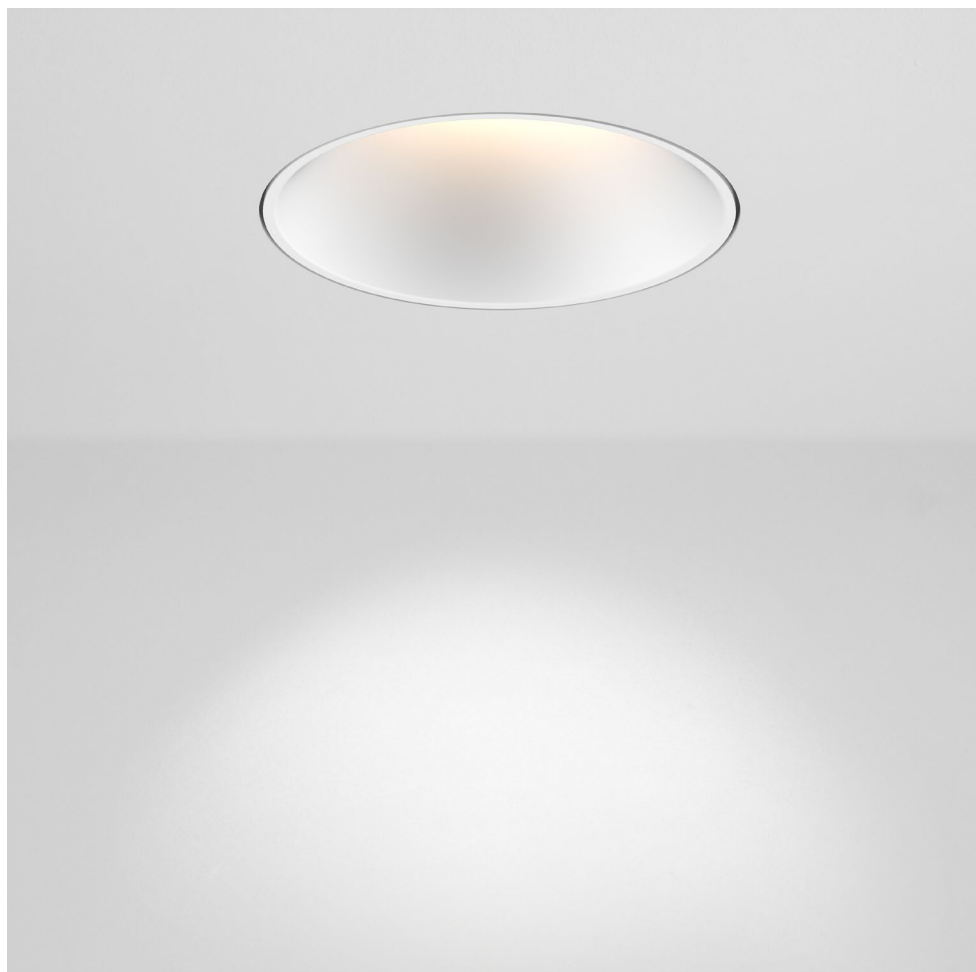

Driver:
- Included in article number and included in price
- External/Remote installation

Data sheets and wiring guide: see website
Driver information: see p.294-295

Air circulation notice:
Do not toplotoad with insulation materials



Focus Trimless **NEW!**

PRICES INCL. DRIVERS

Non dim - Driver 493.24.22 incl.

2700K - Ra90 - 12.9W - 1289lm	1417. AA .24.927. XX
3000K - Ra90 - 12.9W - 1340lm	1417. AA .24.930. XX
4000K - Ra90 - 12.9W - 1361lm	1417. AA .24.940. XX

1-10V dim & Push dim - Driver 490.25.20 incl.

2700K - Ra90 - 12.9W - 1289lm	1417. AA .25.927. XX
3000K - Ra90 - 12.9W - 1340lm	1417. AA .25.930. XX
4000K - Ra90 - 12.9W - 1361lm	1417. AA .25.940. XX

DALI dim - Driver 490.26.20 incl.

2700K - Ra90 - 12.9W - 1289lm	1417. AA .26.927. XX
3000K - Ra90 - 12.9W - 1340lm	1417. AA .26.930. XX
4000K - Ra90 - 12.9W - 1361lm	1417. AA .26.940. XX

Mains dim - Driver 493.27.20 incl.

2700K - Ra90 - 12.9W - 1289lm	1417. AA .27.927. XX
3000K - Ra90 - 12.9W - 1340lm	1417. AA .27.930. XX
4000K - Ra90 - 12.9W - 1361lm	1417. AA .27.940. XX

27° Reflector: 0000.**27**.00.000.00

43° Reflector: 0000.**43**.00.000.00

Available colors: 0000.00.00.000.**XX**

Other RAL colors on request

01



White Matt Text.
Standard

18



Grey Matt Text.
Standard

03



Black Matt Text.
Standard

25



Smoked brown Text.
Standard

16



Gold Matt
Standard

NEW Focus
Recessed

Type Downlight
Mounting Recessed
Material Aluminium
Adjustable No
El. class / IP Class III / IP20
El. class driver Class II
Warranty: see p.308

Citizen CLU LED (350mA)


CCT 2700K / 3000K / 4000K
CRI Ra90
SDCM 3
Luminous flux LED
2700K - Ra90: 1517lm (134lm/W)
3000K - Ra90: 1577lm (139lm/W)
4000K - Ra90: 1601lm (142lm/W)

Luminous Flux System
2700K - Ra90: 1289lm (100lm/W)
3000K - Ra90: 1340lm (109lm/W)
4000K - Ra90: 1361lm (111lm/W)

Beam angle 27° / 43°
LED Power 11.3W / 350mA (excl. driver)
System Power 12.9W / 350mA (incl. driver)
Forward voltage 29.3V (min.) - 32.3V (typ.) - 35.1V (max.)



Ø83mm

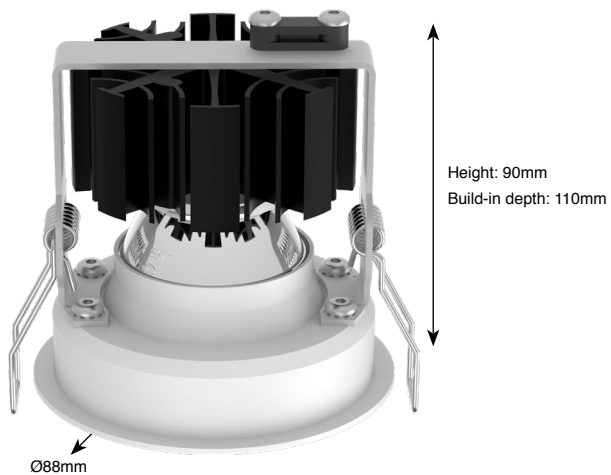

Weight: 270g
(excl. driver)



Driver:
- Included in article number and included in price
- External/Remote installation

Data sheets and wiring guide: see website
Driver information: see p.294-295

Air circulation notice:
Do not toplot with insulation materials



Focus Recessed NEW!

PRICES INCL. DRIVERS

Non dim - Driver 491.24.20 incl.

2700K - Ra90 - 12.9W - 1289lm	1416.AA.24.927.XX
3000K - Ra90 - 12.9W - 1340lm	1416.AA.24.930.XX
4000K - Ra90 - 12.9W - 1361lm	1416.AA.24.940.XX

1-10V dim & Push dim - Driver 490.25.20 incl.

2700K - Ra90 - 12.9W - 1289lm	1416.AA.25.927.XX
3000K - Ra90 - 12.9W - 1340lm	1416.AA.25.930.XX
4000K - Ra90 - 12.9W - 1361lm	1416.AA.25.940.XX

DALI dim - Driver 490.26.20 incl.

2700K - Ra90 - 12.9W - 1289lm	1416.AA.26.927.XX
3000K - Ra90 - 12.9W - 1340lm	1416.AA.26.930.XX
4000K - Ra90 - 12.9W - 1361lm	1416.AA.26.940.XX

Mains dim - Driver 493.27.20 incl.

2700K - Ra90 - 12.9W - 1289lm	1416.AA.27.927.XX
3000K - Ra90 - 12.9W - 1340lm	1416.AA.27.930.XX
4000K - Ra90 - 12.9W - 1361lm	1416.AA.27.940.XX

27° Reflector: 0000.27.00.000.00

43° Reflector: 0000.43.00.000.00

Available colors: 0000.00.00.000.XX

Other RAL colors on request

01



White Matt Text.
Standard

18



Grey Matt Text.
Standard

03



Black Matt Text.
Standard

25



Smoked brown Text.
Standard

16



Gold Matt
Standard

Titan Fix

Round

Type	Downlight
Mounting	Recessed
Material	Aluminium
Adjustable	No
El. class / IP	Class III / IP20
El. class driver	Class II
Warranty: see p.308	

Bridgelux Vero 10 LED (350mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90 (Ra80 on request)
SDCM	3
Luminous Flux LED	2700K - Ra90: 1100lm (124lm/W) 3000K - Ra90: 1156lm (130lm/W) 4000K - Ra90: 1172lm (132lm/W)
Luminous Flux System	2700K - Ra90: 937lm (92lm/W) 3000K - Ra90: 984lm (96lm/W) 4000K - Ra90: 998lm (98lm/W)
Beam angle	28° / 40°
LED Power	8.9W / 350mA (excl. driver)
System Power	10.2W / 350mA (incl. driver)
Forward voltage	23V (min.) - 25.5V (typ.) - 28V (max.)


Bridgelux Dim-to-warm LED (250mA)

CCT	Dim-to-warm 1800-3000K
CRI	Ra90
Luminous Flux LED	LED: 860lm - System: 732lm
LED Power	8.2W / 250mA (excl. driver)
System Power	9.4W / 250mA (incl. driver)

DIM TO WARM



- Ø Boobytrap springs: 76-80mm
- Ø Trapezium springs: 79-80mm

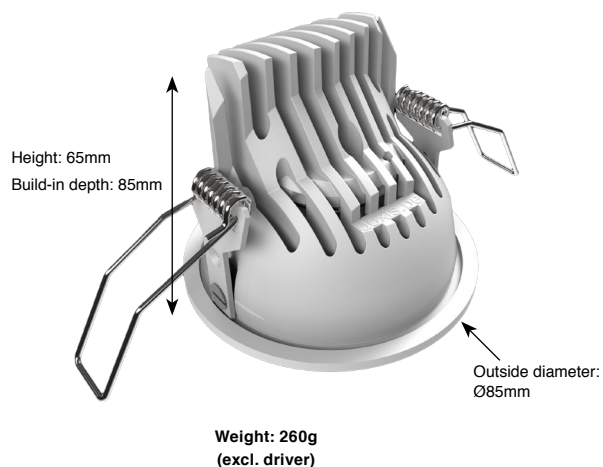

Driver:

- Included in article number and included in price
- External/Remote installation

Data sheets and wiring guide: see website
Driver information: see p.294-295

On Request

Bridgelux Vero10 CRI Ra97



Enlargement ring NEW!

Ring Ø105mm - Matt White texture	1094.00.01
Ring Ø105mm - Matt Black texture	1094.00.03
Ring Ø105mm - Matt Anthracite text.	1094.00.07
Ring Ø105mm - Matt Grey texture	1094.00.18
Ring Ø105mm - Smoked Brown text.	1094.00.25
Ring Ø105mm - Matt Gold	1094.00.16
Ring Ø105mm - Corten	1094.00.15

Enlargement ring makes it possible to enlarge the cut-out hole dimension up to Ø100mm.
Only in combination with boobytrap springs

Air circulation notice:

Do not toptload with insulation materials



Titan Mix

Round

Type	Downlight
Mounting	Recessed
Material	Aluminium
Adjustable	Yes (40°/359°)
El. class / IP	Class III / IP20
El. class driver	Class II
Warranty: see p.308	


Bridgelux Vero 10 LED (350mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90 (Ra80 on request)
SDCM	3
Luminous Flux LED	2700K - Ra90: 1100lm (124lm/W) 3000K - Ra90: 1156lm (130lm/W) 4000K - Ra90: 1172lm (132lm/W)
Luminous Flux System	2700K - Ra90: 937lm (92lm/W) 3000K - Ra90: 984lm (96lm/W) 4000K - Ra90: 998lm (98lm/W)
Beam angle	28° / 40°
LED Power	8.9W / 350mA (excl. driver)
System Power	10.2W / 350mA (incl. driver)
Forward voltage	23V (min.) - 25.5V (typ.) - 28V (max.)

Bridgelux Dim-to-warm LED (250mA)

CCT	Dim-to-warm 1800-3000K
CRI	Ra90
Luminous Flux LED	LED: 860lm - System: 732lm
LED Power	8.2W / 250mA (excl. driver)
System Power	9.4W / 250mA (incl. driver)

DIM TO WARM

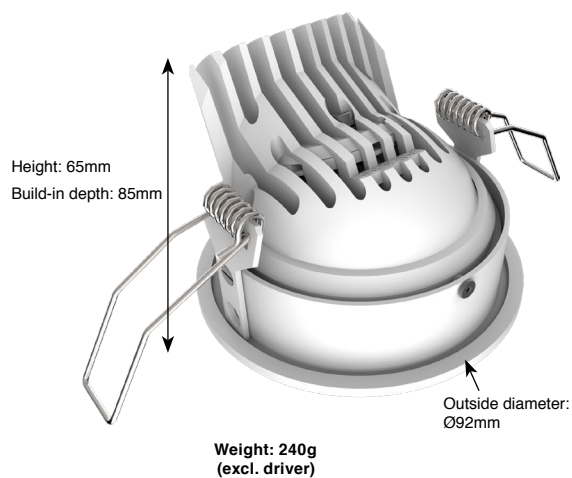

Driver:
- Included in article number and included in price
- External/Remote installation

Data sheets and wiring guide: see website
Driver information: see p.294-295



On Request

Bridgelux Vero10 CRI Ra97

Enlargement ring NEW!

Ring Ø112mm - Matt White texture	1095.00.01
Ring Ø112mm - Matt Black texture	1095.00.03
Ring Ø112mm - Matt Anthracite text.	1095.00.07
Ring Ø112mm - Matt Grey texture	1095.00.18
Ring Ø112mm - Smoked Brown text.	1095.00.25
Ring Ø112mm - Matt Gold	1095.00.16
Ring Ø112mm - Corten	1095.00.15
Enlarge the cut-out hole dimension up to Ø105mm. Only in combination with boobytrap springs	

Air circulation notice:
Do not topload with insulation materials

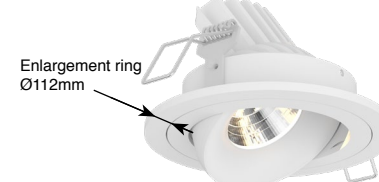


Titan

Surface Mounted

Type	Downlight
Mounting	Surface Mounted
Material	Aluminium
Adjustable	Yes (90°/359°)
El. class / IP	Class I / IP20
Warranty: see p.308	

Bridgelux Vero 10 LED (350mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90 (Ra80 on request)
SDCM	3
Luminous Flux LED	2700K - Ra90: 1100lm (124lm/W) 3000K - Ra90: 1156lm (130lm/W) 4000K - Ra90: 1172lm (132lm/W)
Luminous Flux System	2700K - Ra90: 937lm (92lm/W) 3000K - Ra90: 984lm (96lm/W) 4000K - Ra90: 998lm (98lm/W)
Beam angle	28° / 40°
LED Power	8.9W / 350mA (excl. driver)
System Power	10.2W / 350mA (incl. driver)

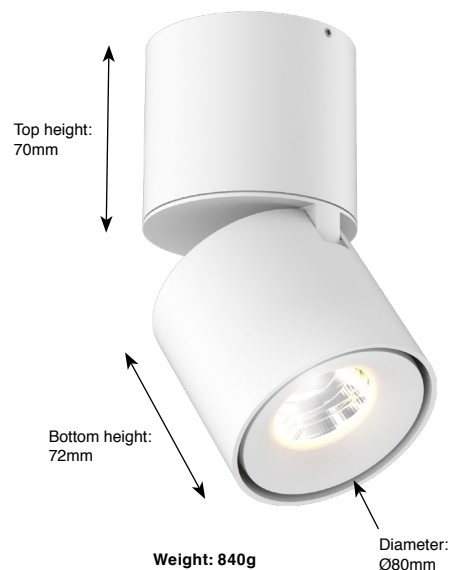

Ceiling mounting on horizontal ceilings only!

- driver integrated in luminaire
- included in article number and price

Data sheets and wiring guide: see website

On Request

Bridgelux Vero10 CRI Ra97



Titan Surface Mounted

Cone

PRICES INCL. BUILT-IN DRIVER

Non dim

2700K - Ra90 - 10.2W - 937lm	1205.AA.24.927.xx
3000K - Ra90 - 10.2W - 984lm	1205.AA.24.930.xx
4000K - Ra90 - 10.2W - 998lm	1205.AA.24.940.xx

Touch & DALI dim* NEW!

2700K - Ra90 - 10.2W - 937lm	1205.AA.26.927.xx
3000K - Ra90 - 10.2W - 984lm	1205.AA.26.930.xx
4000K - Ra90 - 10.2W - 998lm	1205.AA.26.940.xx

Mains dim (Trailing Edge only) NEW!

2700K - Ra90 - 10.2W - 937lm	1205.AA.27.927.xx
3000K - Ra90 - 10.2W - 984lm	1205.AA.27.930.xx
4000K - Ra90 - 10.2W - 998lm	1205.AA.27.940.xx

NEW!



Titan Surface Mounted

Organic

PRICES INCL. BUILT-IN DRIVER

Non dim

2700K - Ra90 - 10.2W - 937lm	1204.AA.24.927.xx
3000K - Ra90 - 10.2W - 984lm	1204.AA.24.930.xx
4000K - Ra90 - 10.2W - 998lm	1204.AA.24.940.xx

Touch & DALI dim* NEW!

2700K - Ra90 - 10.2W - 937lm	1204.AA.26.927.xx
3000K - Ra90 - 10.2W - 984lm	1204.AA.26.930.xx
4000K - Ra90 - 10.2W - 998lm	1204.AA.26.940.xx

Mains dim (Trailing Edge only) NEW!

2700K - Ra90 - 10.2W - 937lm	1204.AA.27.927.xx
3000K - Ra90 - 10.2W - 984lm	1204.AA.27.930.xx
4000K - Ra90 - 10.2W - 998lm	1204.AA.27.940.xx



Titan Surface Mounted

Anti-Glare

PRICES INCL. BUILT-IN DRIVER

Non dim

2700K - Ra90 - 10.2W - 937lm	1206.AA.24.927.xx
3000K - Ra90 - 10.2W - 984lm	1206.AA.24.930.xx
4000K - Ra90 - 10.2W - 998lm	1206.AA.24.940.xx

Touch & DALI dim* NEW!

2700K - Ra90 - 10.2W - 937lm	1206.AA.26.927.xx
3000K - Ra90 - 10.2W - 984lm	1206.AA.26.930.xx
4000K - Ra90 - 10.2W - 998lm	1206.AA.26.940.xx

Mains dim (Trailing Edge only) NEW!

2700K - Ra90 - 10.2W - 937lm	1206.AA.27.927.xx
3000K - Ra90 - 10.2W - 984lm	1206.AA.27.930.xx
4000K - Ra90 - 10.2W - 998lm	1206.AA.27.940.xx

*When dimming with touch. Do not combine with other touch dim products

28° Reflector: 0000.28.00.000.00
40° Reflector: 0000.40.00.000.00

Available colors: 0000.00.00.000.XX
Other RAL colors on request



01
White Matt Text.
Standard



18
Grey Matt Text.
Standard



03
Black Matt Text.
Standard



25
Smoked Brown Text.
Standard



11
Black + Gold Matt
Standard



16
Gold Matt
Standard


Titan 140

Surface Mounted

Type Downlight
Mounting Surface Mounted
Material Aluminium
Adjustable Yes (90°/359°)
El. class / IP Class I / IP20
Warranty: see p.308

Bridgelux Vero 10 LED (350mA)

CCT 2700K / 3000K / 4000K
CRI Ra90 (Ra80 on request)
SDCM 3
Luminous Flux LED
2700K - Ra90: 1100lm (124lm/W)
3000K - Ra90: 1156lm (130lm/W)
4000K - Ra90: 1172lm (132lm/W)
Luminous Flux System
2700K - Ra90: 937lm (92lm/W)
3000K - Ra90: 984lm (96lm/W)
4000K - Ra90: 998lm (98lm/W)
Beam angle 28° / 40°
LED Power 8.9W / 350mA (excl. driver)
System Power 10.2W / 350mA (incl. driver)

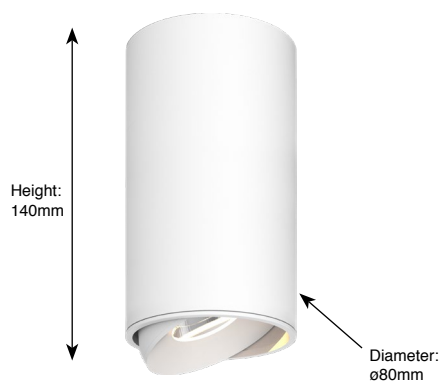

Weight: 590g



Ceiling mounting on horizontal ceilings only!

- driver integrated in luminaire
- included in article number and price

Data sheets and wiring guide: see website


Optional suspension sets

- Standard connecting box comes in the same color as the luminaire housing
- Mounting accessories included
- Strain relief integrated
- Textile (polyester) power cable included, 2000mm

Luminaire color white: white cable

Luminaire color black, brown, gold, copper, corten: black cable

Luminaire color grey, anthracite: grey cable



On Request

Bridgelux Vero10 CRI Ra97

Suspension set 2000mm

White 2000mm - 3x0.75mm ²	103.03.01-2
White 2000mm - 5x0.75mm ²	103.05.01-2
Black 2000mm - 3x0.75mm ²	103.03.03-2
Black 2000mm - 5x0.75mm ²	103.05.03-2
Grey 2000mm - 3x0.75mm ²	103.03.18-2
Grey 2000mm - 5x0.75mm ²	103.05.18-2



Titan 140

Cone

PRICES INCL. BUILT-IN DRIVER

Non dim

2700K - Ra90 - 10.2W - 937lm	1211.AA.24.927.xx
3000K - Ra90 - 10.2W - 984lm	1211.AA.24.930.xx
4000K - Ra90 - 10.2W - 998lm	1211.AA.24.940.xx

Touch & DALI dim* NEW!

2700K - Ra90 - 10.2W - 937lm	1211.AA.26.927.xx
3000K - Ra90 - 10.2W - 984lm	1211.AA.26.930.xx
4000K - Ra90 - 10.2W - 998lm	1211.AA.26.940.xx

Mains dim (Trailing Edge only) NEW!

2700K - Ra90 - 10.2W - 937lm	1211.AA.27.927.xx
3000K - Ra90 - 10.2W - 984lm	1211.AA.27.930.xx
4000K - Ra90 - 10.2W - 998lm	1211.AA.27.940.xx

NEW!



Titan 140

Organic

PRICES INCL. BUILT-IN DRIVER

Non dim

2700K - Ra90 - 10.2W - 937lm	1212.AA.24.927.xx
3000K - Ra90 - 10.2W - 984lm	1212.AA.24.930.xx
4000K - Ra90 - 10.2W - 998lm	1212.AA.24.940.xx

Touch & DALI dim* NEW!

2700K - Ra90 - 10.2W - 937lm	1212.AA.26.927.xx
3000K - Ra90 - 10.2W - 984lm	1212.AA.26.930.xx
4000K - Ra90 - 10.2W - 998lm	1212.AA.26.940.xx

Mains dim (Trailing Edge only) NEW!

2700K - Ra90 - 10.2W - 937lm	1212.AA.27.927.xx
3000K - Ra90 - 10.2W - 984lm	1212.AA.27.930.xx
4000K - Ra90 - 10.2W - 998lm	1212.AA.27.940.xx



Titan 140

Anti-Glare

PRICES INCL. BUILT-IN DRIVER

Non dim

2700K - Ra90 - 10.2W - 937lm	1213.AA.24.927.xx
3000K - Ra90 - 10.2W - 984lm	1213.AA.24.930.xx
4000K - Ra90 - 10.2W - 998lm	1213.AA.24.940.xx

Touch & DALI dim* NEW!

2700K - Ra90 - 10.2W - 937lm	1213.AA.26.927.xx
3000K - Ra90 - 10.2W - 984lm	1213.AA.26.930.xx
4000K - Ra90 - 10.2W - 998lm	1213.AA.26.940.xx

Mains dim (Trailing Edge only) NEW!

2700K - Ra90 - 10.2W - 937lm	1213.AA.27.927.xx
3000K - Ra90 - 10.2W - 984lm	1213.AA.27.930.xx
4000K - Ra90 - 10.2W - 998lm	1213.AA.27.940.xx

*When dimming with touch. Do not combine with other touch dim products

28° Reflector: 0000.28.00.000.00
40° Reflector: 0000.40.00.000.00

Available colors: 0000.00.00.000.XX
Other RAL colors on request




01 White Matt Text.
Standard



18 Grey Matt Text.
Standard



03 Black Matt Text.
Standard



25 Smoked Brown Text. Black + Gold Matt
Standard



11 Black + Gold Matt
Standard



16 Gold Matt
Standard


Titan Box Single (Mix)

Surface Mounted

Type	Downlight
Mounting	Surface Mounted
Material	Aluminium
Adjustable	Yes (90°/359°)
El. class / IP	Class I / IP20
Warranty: see p.308	

Bridgelux Vero 10 LED (350mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90 (Ra80 on request)
SDCM	3
Luminous Flux LED	2700K - Ra90: 1100lm (124lm/W) 3000K - Ra90: 1156lm (130lm/W) 4000K - Ra90: 1172lm (132lm/W)
Luminous Flux System	2700K - Ra90: 937lm (92lm/W) 3000K - Ra90: 984lm (96lm/W) 4000K - Ra90: 998lm (98lm/W)
Beam angle	28° / 40°
LED Power	8.9W / 350mA (excl. driver)
System Power	10.2W / 350mA (incl. driver)

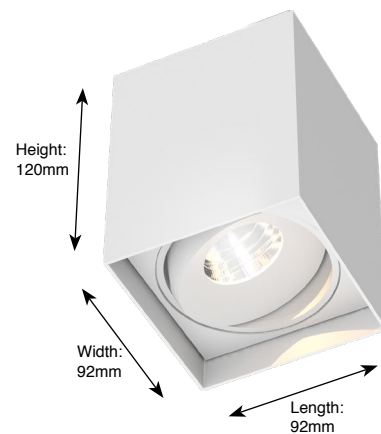

Weight: 1100g



Ceiling mounting on horizontal ceilings only!

- driver integrated in luminaire
- included in article number and price

Data sheets and wiring guide: see website

On Request

Bridgelux Vero10 CRI Ra97



Titan Box Single (Mix)

Cone

PRICES INCL. BUILT-IN DRIVER

Non dim / Mains dim

2700K - Ra90 - 10.2W - 937lm	1413.AA.27.927.xx
3000K - Ra90 - 10.2W - 984lm	1413.AA.27.930.xx
4000K - Ra90 - 10.2W - 998lm	1413.AA.27.940.xx

Touch & DALI dim* NEW!

2700K - Ra90 - 10.2W - 937lm	1413.AA.26.927.xx
3000K - Ra90 - 10.2W - 984lm	1413.AA.26.930.xx
4000K - Ra90 - 10.2W - 998lm	1413.AA.26.940.xx

NEW!



Titan Box Single (Mix)

Organic

PRICES INCL. BUILT-IN DRIVER

Non dim / Mains dim

2700K - Ra90 - 10.2W - 937lm	1414.AA.27.927.xx
3000K - Ra90 - 10.2W - 984lm	1414.AA.27.930.xx
4000K - Ra90 - 10.2W - 998lm	1414.AA.27.940.xx

Touch & DALI dim* NEW!

2700K - Ra90 - 10.2W - 937lm	1414.AA.26.927.xx
3000K - Ra90 - 10.2W - 984lm	1414.AA.26.930.xx
4000K - Ra90 - 10.2W - 998lm	1414.AA.26.940.xx



Titan Box Single (Mix)

Anti-Glare

PRICES INCL. BUILT-IN DRIVER

Non dim / Mains dim

2700K - Ra90 - 10.2W - 937lm	1415.AA.27.927.xx
3000K - Ra90 - 10.2W - 984lm	1415.AA.27.930.xx
4000K - Ra90 - 10.2W - 998lm	1415.AA.27.940.xx

Touch & DALI dim* NEW!

2700K - Ra90 - 10.2W - 937lm	1415.AA.26.927.xx
3000K - Ra90 - 10.2W - 984lm	1415.AA.26.930.xx
4000K - Ra90 - 10.2W - 998lm	1415.AA.26.940.xx

*When dimming with touch. Do not combine with other touch dim products

28° Reflector: 0000.28.00.000.00
40° Reflector: 0000.40.00.000.00

Available colors: 0000.00.00.000.XX
Other RAL colors on request

01



White Matt Text.
Standard

18



Grey Matt Text.
Standard

03




Black Matt Text.
Standard

25



Smoked Brown Text. Black + Gold Matt
Standard

11



NEW Full Moon

400 - 600 - 900

Type	Linear
Mounting	Suspended/Ceiling Mounted
Material	Aluminium/Steel
Adjustable	No
El. class / IP	Class I / IP20
CCT	2700K / 3000K / 4000K
CRI	Ra90
SDCM	3
Warranty:	see p.308

Module Full Moon 400

Luminous Flux	3000K - Ra80: 3586lm (145lm/W)
LED	4000K - Ra80: 3780lm (153lm/W)
Luminous Flux	3000K - Ra80: 2080lm (74lm/W)
System	4000K - Ra80: 2192lm (78lm/W)
LED power	24.7W (excl. driver)
System power	28.0W (incl. driver)

Module Full Moon 600

Luminous Flux	3000K - Ra80: 8268lm (145lm/W)
LED	4000K - Ra80: 8718lm (153lm/W)
Luminous Flux	3000K - Ra80: 4936lm (76lm/W)
System	4000K - Ra80: 5230lm (81lm/W)
LED power	57W (excl. driver)
System power	64.8W (incl. driver)

Module Full Moon 900

Luminous Flux	3000K - Ra80: 21262lm (145lm/W)
LED	4000K - Ra80: 22416lm (153lm/W)
Luminous Flux	3000K - Ra80: 12757lm (76lm/W)
System	4000K - Ra80: 13450lm (81lm/W)
LED power	146.6W (excl. driver)
System power	166.0W (incl. driver)

Optional suspension set:

- Ceiling box (matching luminaire color)
- Integrated strain relief
- Steel suspension wires (3x)
- 230V Textile supply cable:
 - White cable: White luminaire
 - Grey cable: Grey luminaire
 - Black cable: All other luminaire colors



Optional suspension set

Suspension set Full Moon (3 suspension wires)

Set 2000mm - 3x0.75mm²	101.33.xx-2
Set 4000mm - 3x0.75mm²	101.33.xx-4
Set 2000mm - 5x0.75mm²	101.35.xx-2
Set 4000mm - 5x0.75mm²	101.35.xx-4

Available colors: 000.00.xx-0

Suspension set color

Matt White Texture	01	standard
Matt Black Texture	03	standard
Matt Anthracite Texture	07	standard
Matt Grey Texture	18	standard
Smoked Brown Texture	25	standard
Custom colors available on request		

Options

Integrated Emergency Lighting

Standard - 3 Hours	659.24.LED-3
DALI - 3 Hours	659.26.LED-3

Both standard and DALI systems are equipped with self-testing. DALI version with on-command testing, status read-out and additional functionality.

On request

Recessed connecting box (more info on p.300/p.305)
Trimless connecting box (more info on p.300/p.305)



Full Moon 400 **NEW!**

Non dimmable

3000K - Ra80 - 28.1W	1400.00.24.830. XX
4000K - Ra90 - 28.1W	1400.00.24.840. XX

DALI Dimmable

3000K - Ra90 - 28.1W	1400.00.26.830. XX
4000K - Ra90 - 28.1W	1400.00.26.840. XX



Full Moon 600 **NEW!**

Non dimmable

3000K - Ra80 - 63.8W	1600.00.24.830. XX
4000K - Ra90 - 63.8W	1600.00.24.840. XX

1-10V Dimmable

3000K - Ra90 - 63.8W	1600.00.25.830. XX
4000K - Ra90 - 63.8W	1600.00.25.840. XX

Touch & DALI Dimmable

3000K - Ra90 - 63.8W	1600.00.26.830. XX
4000K - Ra90 - 63.8W	1600.00.26.840. XX



Full Moon 900 **NEW!**

Non dimmable

3000K - Ra80 - 163.4W	1900.00.24.830. XX
4000K - Ra90 - 163.4W	1900.00.24.840. XX

1-10V Dimmable

3000K - Ra90 - 163.4W	1900.00.25.830. XX
4000K - Ra90 - 163.4W	1900.00.25.840. XX

Touch & DALI Dimmable

3000K - Ra90 - 163.4W	1900.00.26.830. XX
4000K - Ra90 - 163.4W	1900.00.26.840. XX

Available colors: 000.000.00.000.**XX**
Other RAL colors on request

01



White Matt Text.
Standard

18



Grey Matt Text.
Standard

07



Anthracite
Standard

03



Black Matt Text.
Standard

25



Smoked Brown Text.
Standard






NEW LEDliner30 Standard

Aluminium extruded profile 30x31.5 mm for suspended mounting. LEDliner30 offers the latest and best performing LED lighting technology using Philips LED modules.

Average weight of equipped profile:
1.40kg/m



Possibilities

Mounting:

- Suspended

Modules:

- Linear LED modules - Down

Options/Accessories

- Emergency lighting
- 5 Years [Philips](#) Warranty



Available colors

01

White Matt Text.

03

Black Matt Text.

18

Grey Matt Text.

07

Anthracite Matt Text.


25

Smoked Brown

16

Gold (Optional)

Ready To Go LEDliner30 NEW! Suspended



Average weight of equipped profile: 1.40 kg/m



Included

Profile
End Caps
LED Modules
PC Covers
Suspension cables (2000mm)
Driver housing
Textile power cable (2000mm)

Extra options: p.300-301
Wiring information: p.302
Technical drawings: p.303

Article number	Total length incl. end caps	Bracket amount	LED Flux* 927	LED Flux* 830 & 930	LED Flux* 840 & 940	LED Flux* Tunable White 2700-6500K	Power** 830 & 840	Power** 927, 930 & 940
R30SU.DM.CCC.xx-08	1125 mm	2	4020lm	4160lm	4400lm	4400lm	24.0W	24.8W
R30SU.DM.CCC.xx-09	1267 mm	2	n.a.***	4680lm	4950lm	n.a.***	27.0W	27.9W
R30SU.DM.CCC.xx-10	1407 mm	2	5025lm	5200lm	5500lm	5500lm	30.0W	31.0W
R30SU.DM.CCC.xx-11	1549 mm	2	n.a.***	5720lm	6050lm	n.a.***	33.0W	34.1W
R30SU.DM.CCC.xx-12	1688 mm	2	6030lm	6240lm	6600lm	6600lm	36.0W	37.2W
R30SU.DM.CCC.xx-13	1829 mm	2	n.a.***	6760lm	7150lm	n.a.***	39.0W	40.3W
R30SU.DM.CCC.xx-14	1968 mm	3	7035lm	7280lm	7700lm	7700lm	42.0W	43.4W
R30SU.DM.CCC.xx-15	2110 mm	3	n.a.***	7800lm	8250lm	n.a.***	45.0W	46.5W
R30SU.DM.CCC.xx-16	2248 mm	3	8040lm	8320lm	8800lm	8800lm	48.0W	49.6W
R30SU.DM.CCC.xx-17	2390 mm	3	n.a.***	8840lm	9350lm	n.a.***	51.0W	52.7W
R30SU.DM.CCC.xx-18	2530 mm	3	9045lm	9360lm	9900lm	9900lm	54.0W	55.8W
R30SU.DM.CCC.xx-19	2670 mm	3	n.a.***	9880lm	10450lm	n.a.***	57.0W	58.9W
R30SU.DM.CCC.xx-20	2808 mm	3	10050lm	10400lm	11000lm	11000lm	60.0W	62.0W
R30SU.DM.CCC.xx-21	2950 mm	3	n.a.***	10920lm	11550lm	n.a.***	63.0W	65.1W
R30SU.DM.CCC.xx-22	3090 mm	3	11055lm	11440lm	12100lm	12100lm	66.0W	68.2W
R30SU.DM.CCC.xx-23	3232 mm	3	n.a.***	11960lm	12650lm	n.a.***	69.0W	71.3W
R30SU.DM.CCC.xx-24	3369 mm	3	12060lm	12480lm	13200lm	13200lm	72.0W	74.4W

* Luminous flux mentioned is the flux of the LED modules. To know the luminous flux of the luminaire, please apply the light output ratios on page 297 or check www.doxis.be.

** Power mentioned is for LED module excl. driver. For Tunable White power consumption please check www.doxis.be. For more detailed information, please check www.doxis.be


*** Not available. Our supplier, Philips, does not provide 140mm LED modules in 2700K and Tunable White. Length 600mm not available in 1-10V dimmable

Article number structure: **R30SU.DM.CCC.xx-00**

24: Non dimmable
25: 1-10V dim.
26: Touch & DALI dim.

830: Ra80 - 3000K
840: Ra80 - 4000K
927: Ra90 - 2700K (available in limited lengths)
930: Ra90 - 3000K
940: Ra90 - 4000K
TW: Ra90 - 4000K

01: White Matt Texture
03: Black Matt Texture
18: Grey 9006 Matt Texture
07: Anthracite Matt Texture
25: Smoked Brown Matt Texture
16: Gold
Other colors on request

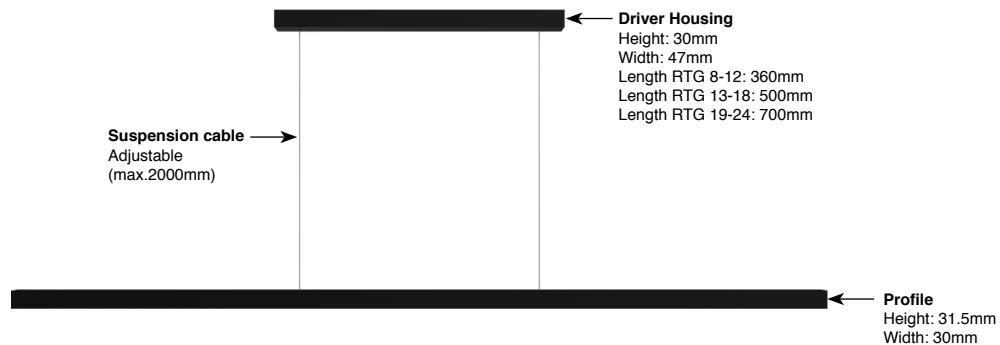


NEW LEDliner30

Glare-control

Aluminium extruded profile 30x31.5 mm for suspended mounting. LEDliner30 offers the latest and best performing LED lighting technology using Philips LED modules.

Average weight of equipped profile:
1.40kg/m



Possibilities

Mounting:

- Suspended

Modules:

- Linear LED modules - Down

Options/Accessories

- Emergency lighting
- 5 Years [Philips](#) Warranty



Available colors

01

White Matt Text.

03

Black Matt Text.

18

Grey Matt Text.

07

Anthracite Matt Text.


25

Smoked Brown

16

Gold (Optional)

Ready To Go LEDliner30 NEW! Suspended UGR



Average weight of equipped profile: 1.40 kg/m



Included

Profile
End Caps
LED Modules
PC Covers
Suspension cables (2000mm)
Driver housing
Textile power cable (2000mm)

Extra options: p.300-301
Wiring information: p.302
Technical drawings: p.303

LEDliner30 Suspended - Glare-control 19

Article number	Total length incl. end caps	LED Flux*	Power** 830	Power** 840	UGR
R30SU.DM.CCC.xx-08.G	1136 mm	1460 lm	8.2W	8.0W	19
R30SU.DM.CCC.xx-10.G	1418 mm	1825 lm	10.3W	10.0W	19
R30SU.DM.CCC.xx-12.G	1696 mm	2190 lm	12.4W	12.0W	19
R30SU.DM.CCC.xx-14.G	1983 mm	2555 lm	14.4W	14.0W	19
R30SU.DM.CCC.xx-16.G	2265 mm	2920 lm	16.5W	16.0W	19
R30SU.DM.CCC.xx-18.G	2548 mm	3285 lm	18.5W	18.0W	19
R30SU.DM.CCC.xx-20.G	2831 mm	3650 lm	20.6W	20.0W	19
R30SU.DM.CCC.xx-22.G	3114 mm	4015 lm	22.7W	22.0W	19
R30SU.DM.CCC.xx-24.G	3396 mm	4380 lm	24.7W	24.0W	19

LEDliner30 Suspended - Glare-control 21

Article number	Total length incl. end caps	LED Flux*	Power** 830	Power** 840	UGR
R30SU.DM.CCC.xx-08.H	1136 mm	2490 lm	15.4W	14.5W	< 21
R30SU.DM.CCC.xx-10.H	1418 mm	3112 lm	19.3W	18.2W	< 21
R30SU.DM.CCC.xx-12.H	1696 mm	3734 lm	23.1W	21.8W	< 21
R30SU.DM.CCC.xx-14.H	1983 mm	4357 lm	27.0W	25.4W	< 21
R30SU.DM.CCC.xx-16.H	2265 mm	4980 lm	30.8W	29.0W	< 21
R30SU.DM.CCC.xx-18.H	2548 mm	5602 lm	34.7W	32.7W	< 21
R30SU.DM.CCC.xx-20.H	2831 mm	6224 lm	38.5W	36.3W	< 21
R30SU.DM.CCC.xx-22.H	3114 mm	6847 lm	42.4W	39.9W	< 21
R30SU.DM.CCC.xx-24.H	3396 mm	7469 lm	46.2W	43.6W	< 21

* Luminous flux mentioned is the flux of the LED modules. To know the luminous flux of the luminaire, please apply the light output ratios on page 297 or check www.doxis.be.


** Power mentioned is for LED module excl. driver. For more detailed information, please check www.doxis.be

Article number structure: **R30SU.DM.CCC.xx-00.G**

24: Non dimmable
26: Touch & DALI dim.

830: Ra80 - 3000K
840: Ra80 - 4000K


01: White Matt Texture
03: Black Matt Texture
18: Grey 9006 Matt Text.
07: Anthracite Matt Text.
Other colors on request

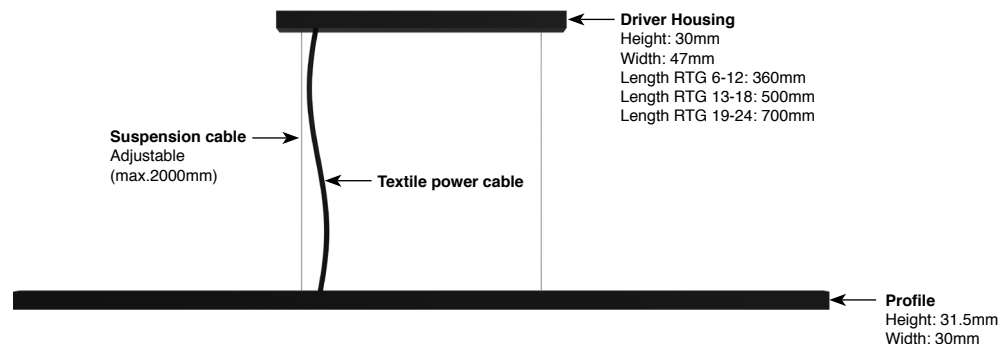






Ready To Go LEDliner35 Down - Ceiling Mounted



Average weight of equipped profile: 1.60 kg/m



Opal cover is standard. Prismatic cover is not available for LEDliner35.

Included

Profile
Top cover
End Caps
LED Modules
PC Cover Down
Mounting profile

Extra options: p.300-301
Wiring information: p.302
Technical drawings: p.303

Article number	Total length	Connected profile lengths excl. end caps	LED Flux* 927	LED Flux* 830 & 930	LED Flux* 840 & 940	LED Flux* Tunable White 2700-6500K	Power** 830 & 840	Power** 927, 930 & 940
R35CM.DM.CCC.xx-04	600 mm	-	n.a.***	2080lm	2200lm	n.a.***	12.0W	12.4W
R35CM.DM.CCC.xx-05	740 mm	-	n.a.***	3120lm	3300lm	n.a.***	15.0W	15.5W
R35CM.DM.CCC.xx-06	879 mm	-	3015lm	3120lm	3300lm	3300lm	18.0W	18.6W
R35CM.DM.CCC.xx-07	1021 mm	-	n.a.***	3640lm	3850lm	n.a.***	21.0W	21.7W
R35CM.DM.CCC.xx-08	1159 mm	-	4020lm	4160lm	4400lm	4400lm	24.0W	24.8W
R35CM.DM.CCC.xx-09	1301 mm	-	n.a.***	4680lm	4950lm	n.a.***	27.0W	27.9W
R35CM.DM.CCC.xx-10	1441 mm	-	5025lm	5200lm	5500lm	5500lm	30.0W	31.0W
R35CM.DM.CCC.xx-11	1583 mm	-	n.a.***	5720lm	6050lm	n.a.***	33.0W	34.1W
R35CM.DM.CCC.xx-12	1721 mm	-	6030lm	6240lm	6600lm	6600lm	36.0W	37.2W
R35CM.DM.CCC.xx-13	1863 mm	-	n.a.***	6760lm	7150lm	n.a.***	39.0W	40.3W
R35CM.DM.CCC.xx-14	2002 mm	-	7035lm	7280lm	7700lm	7700lm	42.0W	43.4W
R35CM.DM.CCC.xx-15	2144 mm	-	n.a.***	7800lm	8250lm	n.a.***	45.0W	46.5W
R35CM.DM.CCC.xx-16	2282 mm	-	8040lm	8320lm	8800lm	8800lm	48.0W	49.6W
R35CM.DM.CCC.xx-17	2424 mm	-	n.a.***	8840lm	9350lm	n.a.***	51.0W	52.7W
R35CM.DM.CCC.xx-18	2564 mm	-	9045lm	9360lm	9900lm	9900lm	54.0W	55.8W
R35CM.DM.CCC.xx-19	2706 mm	-	n.a.***	9880lm	10450lm	n.a.***	57.0W	58.9W
R35CM.DM.CCC.xx-20	2844 mm	-	10050lm	10400lm	11000lm	11000lm	60.0W	62.0W
R35CM.DM.CCC.xx-21	2986 mm	-	n.a.***	10920lm	11550lm	n.a.***	63.0W	65.1W
R35CM.DM.CCC.xx-22	3125 mm	-	11055lm	11440lm	12100lm	12100lm	66.0W	68.2W
R35CM.DM.CCC.xx-23	3267 mm	-	n.a.***	11960lm	12650lm	n.a.***	69.0W	71.3W
R35CM.DM.CCC.xx-24	3405 mm	-	12060lm	12480lm	13200lm	13200lm	72.0W	74.4W
R35CM.DM.CCC.xx-25	3548 mm	1701+1843 mm	n.a.***	13000lm	13750lm	n.a.***	75.0W	77.5W
R35CM.DM.CCC.xx-26	3687 mm	1701+1982 mm	13065lm	13520lm	14300lm	14300lm	78.0W	80.6W
R35CM.DM.CCC.xx-27	3829 mm	1843+1982 mm	n.a.***	14040lm	14850lm	n.a.***	81.0W	83.7W
R35CM.DM.CCC.xx-28	3968 mm	1982+1982 mm	14070lm	14560lm	15400lm	15400lm	84.0W	86.8W
R35CM.DM.CCC.xx-29	4110 mm	1982+2125 mm	n.a.***	15080lm	15950lm	n.a.***	87.0W	89.9W
R35CM.DM.CCC.xx-30	4248 mm	1982+2262 mm	15075lm	15600lm	16500lm	16500lm	90.0W	93.0W
R35CM.DM.CCC.xx-31	4390 mm	2125+2262 mm	n.a.***	16120lm	17050lm	n.a.***	93.0W	96.1W
R35CM.DM.CCC.xx-32	4528 mm	2262+2262 mm	16080lm	16640lm	17600lm	17600lm	96.0W	99.2W
R35CM.DM.CCC.xx-33	4670 mm	2262+2405 mm	n.a.***	17160lm	18150lm	n.a.***	99.0W	102.3W
R35CM.DM.CCC.xx-34	4810 mm	2262+2544 mm	17085lm	17680lm	18700lm	18700lm	102.0W	105.4W
R35CM.DM.CCC.xx-35	4952 mm	2405+2544 mm	n.a.***	18200lm	19250lm	n.a.***	105.0W	108.5W
R35CM.DM.CCC.xx-36	5091 mm	2544+2544 mm	18090lm	18720lm	19800lm	19800lm	108.0W	111.6W
R35CM.DM.CCC.xx-37	5233 mm	2544+2686 mm	n.a.***	19240lm	20350lm	n.a.***	111.0W	114.7W
R35CM.DM.CCC.xx-38	5371 mm	2544+2824 mm	19095lm	19760lm	20900lm	20900lm	114.0W	117.8W
R35CM.DM.CCC.xx-39	5513 mm	2544+2966 mm	n.a.***	20280lm	21450lm	n.a.***	117.0W	120.9W
R35CM.DM.CCC.xx-40	5653 mm	2544+3105 mm	20100lm	20800lm	22000lm	22000lm	120.0W	124.0W
R35CM.DM.CCC.xx-41	5795 mm	2544+3248 mm	n.a.***	21320lm	22550lm	n.a.***	123.0W	127.1W
R35CM.DM.CCC.xx-42	5933 mm	2824+3105 mm	21105lm	21840lm	23100lm	23100lm	126.0W	130.2W
R35CM.DM.CCC.xx-43	6075 mm	2966+3105 mm	n.a.***	22360lm	23650lm	n.a.***	129.0W	133.3W
R35CM.DM.CCC.xx-44	6214 mm	3105+3105 mm	22110lm	22880lm	24200lm	24200lm	132.0W	136.4W
R35CM.DM.CCC.xx-45	6356 mm	3105+3248 mm	n.a.***	23400lm	24750lm	n.a.***	135.0W	139.5W
R35CM.DM.CCC.xx-46	6494 mm	3105+3385 mm	23115lm	23920lm	25300lm	25300lm	138.0W	142.6W
R35CM.DM.CCC.xx-47	6636 mm	3248+3385 mm	n.a.***	24440lm	25850lm	n.a.***	141.0W	145.7W
R35CM.DM.CCC.xx-48	6774 mm	3385+3385 mm	24120lm	24960lm	26400lm	26400lm	144.0W	148.8W

* Luminous flux mentioned is the flux of the LED modules. To know the luminous flux of the luminaire, please apply the light output ratios on page 297 or check www.doxis.be.

** Power mentioned is for LED module excl. driver. For Tunable White power consumption please check www.doxis.be. For more detailed information, please check www.doxis.be.

*** Not available. Our supplier, Philips, does not provide 140mm LED modules in 2700K and Tunable White. Length 600mm not available in 1-10V dimmable

Article number structure: **R35CM.DM.CCC.xx-00**

24: Non dimmable
25: 1-10V dimmable
26: Touch & DALI dim
830: Ra80 - 3000K
840: Ra80 - 4000K
927: Ra90 - 2700K (available in limited lengths)
930: Ra90 - 3000K
940: Ra90 - 4000K
TW: Tunable white 2700K-6500K (available in limited lengths)

01: White Matt Texture
03: Black Matt Texture
18: Grey 9006 Matt Texture
07: Anthracite Matt Texture
25: Smoked Brown Matt Texture
16: Gold
Other colors on request

NEW!

LEDliner66 - Optional modules



Emergency module for linear modules

3Hrs Standard 659.24.LED-3
3Hrs DALI 659.26.LED-3

Emergency modules are equipped with self-testing.
DALI version with on command testing, status read-out
and additional functionality.

More info see p.299



Tridonic BasicDIM module (Casambi)

Casambi module 660.26.00

Only in combination with DALI drivers
One module for each driver required
Module is built into luminaire

NEW!

LEDliner66 - Spot modules

Juno

Orientable spot module (driver included)



44° Reflector	2700K - 380lm	2212.24.927.XX
Non dim	3000K - 400lm	2212.24.930.XX
Ra90	4000K - 409lm	2212.24.940.XX


Touch & DALI version available on request (only multiples of 4 spots)



Soft Beam	2700K - 380lm	2213.24.927.XX
Non dim	3000K - 400lm	2213.24.930.XX
Ra90	4000K - 409lm	2213.24.940.XX

Touch & DALI version available on request (only multiples of 4 spots)

Module length



Colors

Matt White Texture	01	standard
Matt Black Texture	03	standard
Matt Anthracite Texture	07	standard
Matt Grey 9006Texture	18	standard
Smoked Brown Texture	25	standard
Gold Matt	16	
Other RAL colors on request		

Tektus 45

Orientable spot module



Available in:

2700K - Ra90 - 10.1W - 779lm
3000K - Ra90 - 10.1W - 811lm
4000K - Ra90 - 10.1W - 863lm


Non dim or Touch & Dali dim

Various beam angles and colors available

[See p.220 for more information](#)

Tektus 60

Orientable spot module



Available in:

2700K - Ra90 - 995lm(12.8W) or 1390lm(18.7W)
3000K - Ra90 - 1035lm(12.8W) or 1445lm (18.7W)
4000K - Ra90 - 1052lm(12.8W) or 1467lm (18.7W)

Non dim or Touch & Dali dim

Various beam angles and colors available

[See p.220 for more information](#)

NEW!

NEW Tektus Spot Module

For mounting on LEDliner profiles


Type Spot-/Downlight
 Mounting Mounting in LEDliner Profiles
 Material Aluminium
 Adjustable Yes (60°/359°)
 El. class / IP Class I / IP20
 Warranty: see p.308

Bridgelux Vero 10 LED (350mA)

CCT 2700K / 3000K / 4000K
 CRI Ra90 (Ra80 on request)
 SDCM 3
 Luminous Flux LED
 2700K - Ra90: 1100lm (124lm/W)
 3000K - Ra90: 1156lm (130lm/W)
 4000K - Ra90: 1072lm (132lm/W)
 Luminous Flux System
 2700K - Ra90: 772lm (76lm/W)
 3000K - Ra90: 811lm (80lm/W)
 4000K - Ra90: 822lm (81lm/W)
 Beam angle 29° / 40° / 51°
 LED Power 8.9W (excl. driver)
 System Power 10.2W (incl. driver)

Citizen CLU LED (350mA/500mA)


CCT 2700K / 3000K / 4000K
 CRI Ra90
 SDCM 3
 Luminous flux LED (350/500mA)
 2700K - Ra90: 1517lm (350mA) / 2118lm (500mA)
 3000K - Ra90: 1577lm (350mA) / 2202lm (500mA)
 4000K - Ra90: 1601lm (350mA) / 2236lm (500mA)
 Luminous Flux System
 2700K - Ra90: 995lm (350mA) / 1390lm (500mA)
 3000K - Ra90: 1035lm (350mA) / 1445lm (500mA)
 4000K - Ra90: 1050lm (350mA) / 1467lm (500mA)
 Beam angle 23° / 36° / 48° / 57°
 LED Power 11.3W / 350mA or 16.5W / 500mA (excl. driver)
 System Power 12.9W / 350mA or 19.0W / 500mA (incl. driver)

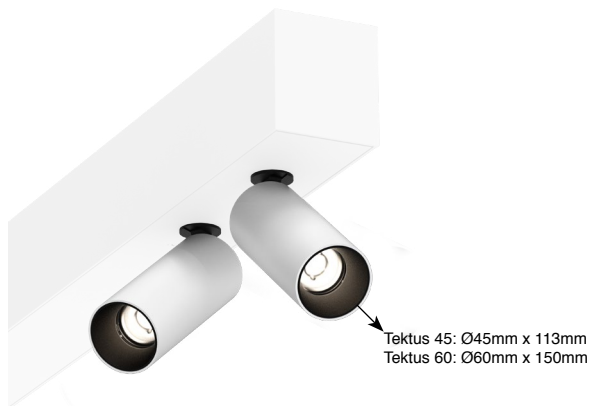


On Request

Tektus 45 Single in CRI Ra97
 Tektus 45 Double in CRI Ra97
 (Only available for Tektus45)

Module length Tektus Single:



Module length Tektus Double:



Suitable profiles:

LEDliner35
 LEDliner40 Recessed/Trimless
 LEDliner47
 LEDliner65
 LEDliner65Recessed
 LEDliner66
 LEDliner80
 LEDliner100 Recessed/Trimless
 LEDliner170



Tektus 45 Single **NEW!**

PRICES INCL. DRIVER

Module only, LEDliner profile not included

Non dim Single* - 1x Tektus 45 on one driver

(1x) 2700K - Ra90 - 10.2W - 772lm 1248.**AA.24.927.XX**

(1x) 3000K - Ra90 - 10.2W - 811lm 1248.**AA.24.930.XX**

(1x) 4000K - Ra90 - 10.2W - 822lm 1248.**AA.24.940.XX**

Touch & DALI dim Single - 1x Tektus 45 on one driver

(1x) 2700K - Ra90 - 10.2W - 772lm 1248.**AA.26.927.XX**

(1x) 3000K - Ra90 - 10.2W - 811lm 1248.**AA.26.930.XX**

(1x) 4000K - Ra90 - 10.2W - 822lm 1248.**AA.26.940.XX**

Tektus 45 Double **NEW!**

PRICES INCL. DRIVER

Module only, LEDliner profile not included

Non dim Double - 2x Tektus 45 on one driver

(2x) 2700K - Ra90 - 10.2W - 772lm 1300.**AA.24.927.XX**

(2x) 3000K - Ra90 - 10.2W - 811lm 1300.**AA.24.930.XX**

(2x) 4000K - Ra90 - 10.2W - 822lm 1300.**AA.24.940.XX**

Touch & DALI dim Double - 2x Tektus 45 on one driver

(2x) 2700K - Ra90 - 10.2W - 772lm 1300.**AA.26.927.XX**


(2x) 3000K - Ra90 - 10.2W - 811lm 1300.**AA.26.930.XX**

(2x) 4000K - Ra90 - 10.2W - 822lm 1300.**AA.26.940.XX**

29° Reflector: 0000.**29.00.000.00**

40° Reflector: 0000.**40.00.000.00**

51° Reflector: 0000.**51.00.000.00**

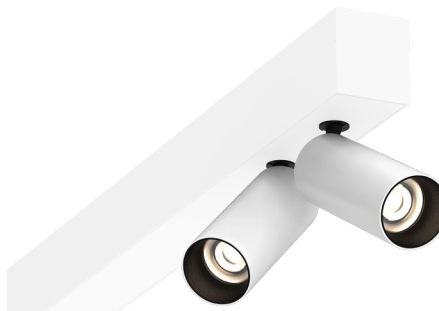

Tektus 60 Single (350mA) **NEW!**

PRICES INCL. DRIVERS

Module only, LEDliner profile not included

Non dim Single - 1x Tektus 60 on one 350mA driver

(1x) 2700K - Ra90 - 12.9W - 995lm 1249.**AA.24.927.XX**

(1x) 3000K - Ra90 - 12.9W - 1035lm 1249.**AA.24.930.XX**

(1x) 4000K - Ra90 - 12.9W - 1050lm 1249.**AA.24.940.XX**

Touch & DALI dim Single - 1x Tektus 60 on one 350mA driver

(1x) 2700K - Ra90 - 12.9W - 995lm 1249.**AA.26.927.XX**

(1x) 3000K - Ra90 - 12.9W - 1035lm 1249.**AA.26.930.XX**

(1x) 4000K - Ra90 - 12.9W - 1050lm 1249.**AA.26.940.XX**

Tektus 60 Double (350mA) **NEW!**

PRICES INCL. DRIVER

Module only, LEDliner profile not included

Non dim Double - 2x Tektus 60 on one 350mA driver

(2x) 2700K - Ra90 - 12.9W - 995lm 1301.**AA.24.927.XX**

(2x) 3000K - Ra90 - 12.9W - 1035lm 1301.**AA.24.930.XX**

(2x) 4000K - Ra90 - 12.9W - 1050lm 1301.**AA.24.940.XX**

Touch & DALI dim Double - 2x Tektus 60 on one 350mA driver

(2x) 2700K - Ra90 - 12.9W - 995lm 1301.**AA.26.927.XX**

(2x) 3000K - Ra90 - 12.9W - 1035lm 1301.**AA.26.930.XX**


(2x) 4000K - Ra90 - 12.9W - 1050lm 1301.**AA.26.940.XX**

23° Reflector: 0000.**23.00.000.00**

36° Reflector: 0000.**36.00.000.00**

48° Reflector: 0000.**48.00.000.00**

57° Reflector: 0000.**57.00.000.00**

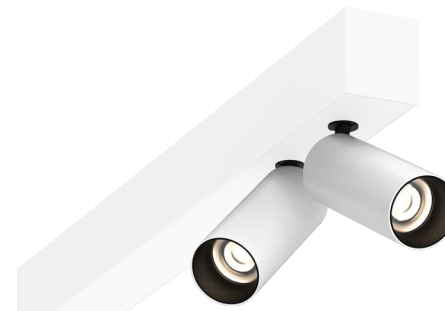

Tektus 60 Single (500mA) **NEW!**

PRICES INCL. DRIVERS

Module only, LEDliner profile not included

Non dim Single - 1x Tektus 60 on one 500mA driver

(1x) 2700K - Ra90 - 19.0W - 1390lm 1250.**AA.24.927.XX**

(1x) 3000K - Ra90 - 19.0W - 1445lm 1250.**AA.24.930.XX**

(1x) 4000K - Ra90 - 19.0W - 1467lm 1250.**AA.24.940.XX**

Touch & DALI dim Single - 1x Tektus 60 on one 500mA driver

(1x) 2700K - Ra90 - 19.0W - 1390lm 1250.**AA.26.927.XX**

(1x) 3000K - Ra90 - 19.0W - 1445lm 1250.**AA.26.930.XX**

(1x) 4000K - Ra90 - 19.0W - 1467lm 1250.**AA.26.940.XX**

Tektus 60 Double (500mA) **NEW!**

PRICES INCL. DRIVER

Module only, LEDliner profile not included

Non dim Double - 2x Tektus 60 on one 500mA driver

(2x) 2700K - Ra90 - 19.0W - 1390lm 1302.**AA.24.927.XX**

(2x) 3000K - Ra90 - 19.0W - 1445lm 1302.**AA.24.930.XX**

(2x) 4000K - Ra90 - 19.0W - 1467lm 1302.**AA.24.940.XX**

Touch & DALI dim Double - 2x Tektus 60 on one 500mA driver

(2x) 2700K - Ra90 - 19.0W - 1390lm 1302.**AA.26.927.XX**

(2x) 3000K - Ra90 - 19.0W - 1445lm 1302.**AA.26.930.XX**

(2x) 4000K - Ra90 - 19.0W - 1467lm 1302.**AA.26.940.XX**

23° Reflector: 0000.**23.00.000.00**

36° Reflector: 0000.**36.00.000.00**

48° Reflector: 0000.**48.00.000.00**

57° Reflector: 0000.**57.00.000.00**

Available colors: 0000.00.00.00.**XX**
Other RAL colors on request

01



White Matt Text.
Standard

18



Grey Matt Text.
Standard

07



Anthracite Matt Text.
Standard

03



Black Matt Text.
Standard

16



Gold Matt